

Current Status and Challenges of R&D for Decommissioning of Fukushima Daiichi Nuclear Power Station 福島第一原子力発電所廃炉 研究開発の現状と課題

NICC

Institute of Science Tokyo

July 29, 2026

Senior Manager Planning and Administration Department

International Research Institute for Nuclear Decommissioning (IRID)

Naoaki Okuzumi

The results are obtained under the Subsidy Project of Decommissioning and Contaminated Water Management granted by the Ministry of Economy, Trade and Industry.

Unauthorized copy and reproduction prohibited.

©International Research Institute for Nuclear Decommissioning

Self Introduction

Naoaki Okuzumi

- July 2016- current Senior Manager, Planning and Administration Department,
International Research Institute for Nuclear Decommissioning(IRID)
- June 2016 Retired Toshiba Corporation
- 2000-2016 General Manager, Corporate Communications Division etc.,
Toshiba Head Quarters
- (Dec.1990-Jan.1992: Liaison Manager in GE Nuclear Energy at San Jose CA, U.S.A.)
- 1979-2000 System Engineering Department of Nuclear Energy Division etc.,
System Engineer for BWR Nuclear System, Toshiba Corporation
- Apr.1979 Joined Toshiba Corporation
- Mar.1979 Graduated from Faculty of Mechanical Engineering,
the University of Tokyo
- June 1956 Born in Tokyo

Contents

1. Introduction
2. Development of Remotely Operation Equipment for Dose Reduction
3. Development of Repairing Technology for PCV
4. Development of Investigation Technology for inside PCV
5. Development of Technology for Fuel Debris Retrieval
6. Nuclear Safety Enhancement

PCV: primary containment vessel

Contents

1. Introduction
2. Development of Remotely Operation Equipment for Dose Reduction
3. Development of Repairing Technology for PCV
4. Development of Investigation Technology for inside PCV
5. Development of Technology for Fuel Debris Retrieval
6. Nuclear Safety Enhancement

PCV : Primary containment vessel

Video: Introduction of IRID

What's These?




USS Nautilus, SSN-571
Launching 1954
Powered By WEC PWR



USS Seawolf, SSN-575
Launching 1955
Powered By GE Sodium Cooled Reactor

■ Boiling Water Reactor (BWR)

The reactor heats water, which turns to steam and drives a steam turbine.

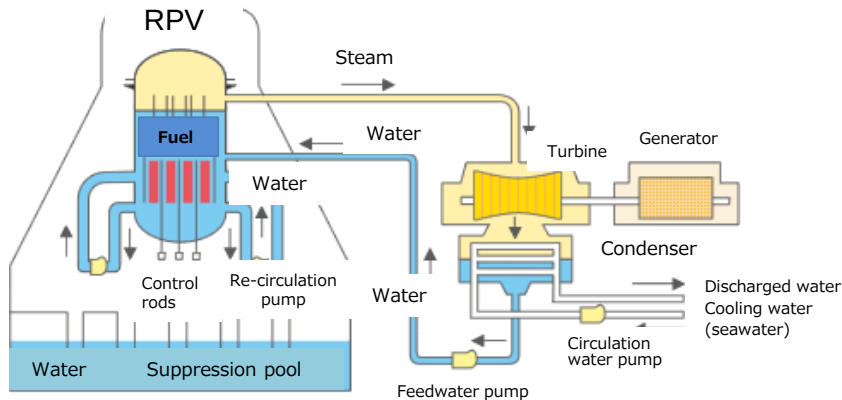


*Reference: *The Nuclear Consensus 2014*, issued by Federation of Electric Power Companies

BWR : Boiling Water Reactor

Reactor Operating Pressure : 7Mpa

■ Pressurized Water Reactor (PWR)

The heated and high pressure water flows to a steam generator. Then the steam drives turbines.

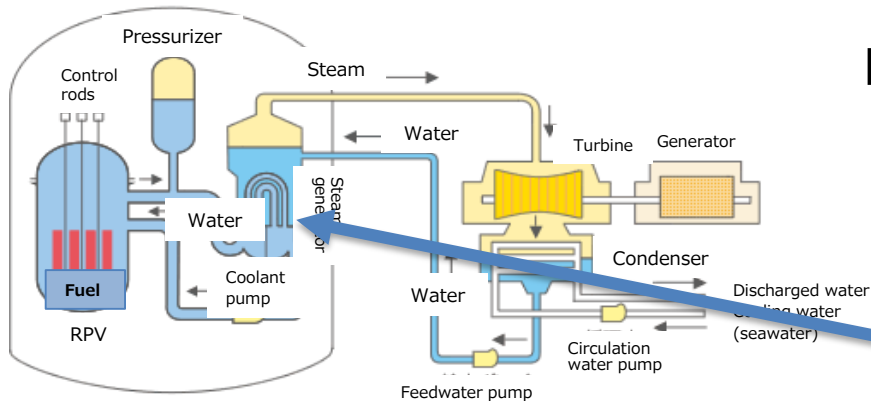


*Reference: *The Nuclear Consensus 2014*, issued by Federation of Electric Power Companies

PWR : Pressurized Water Reactor


Reactor Operating Pressure : 30Mpa

**Steam
Generator**

Boiling Water Reactor (BWR)

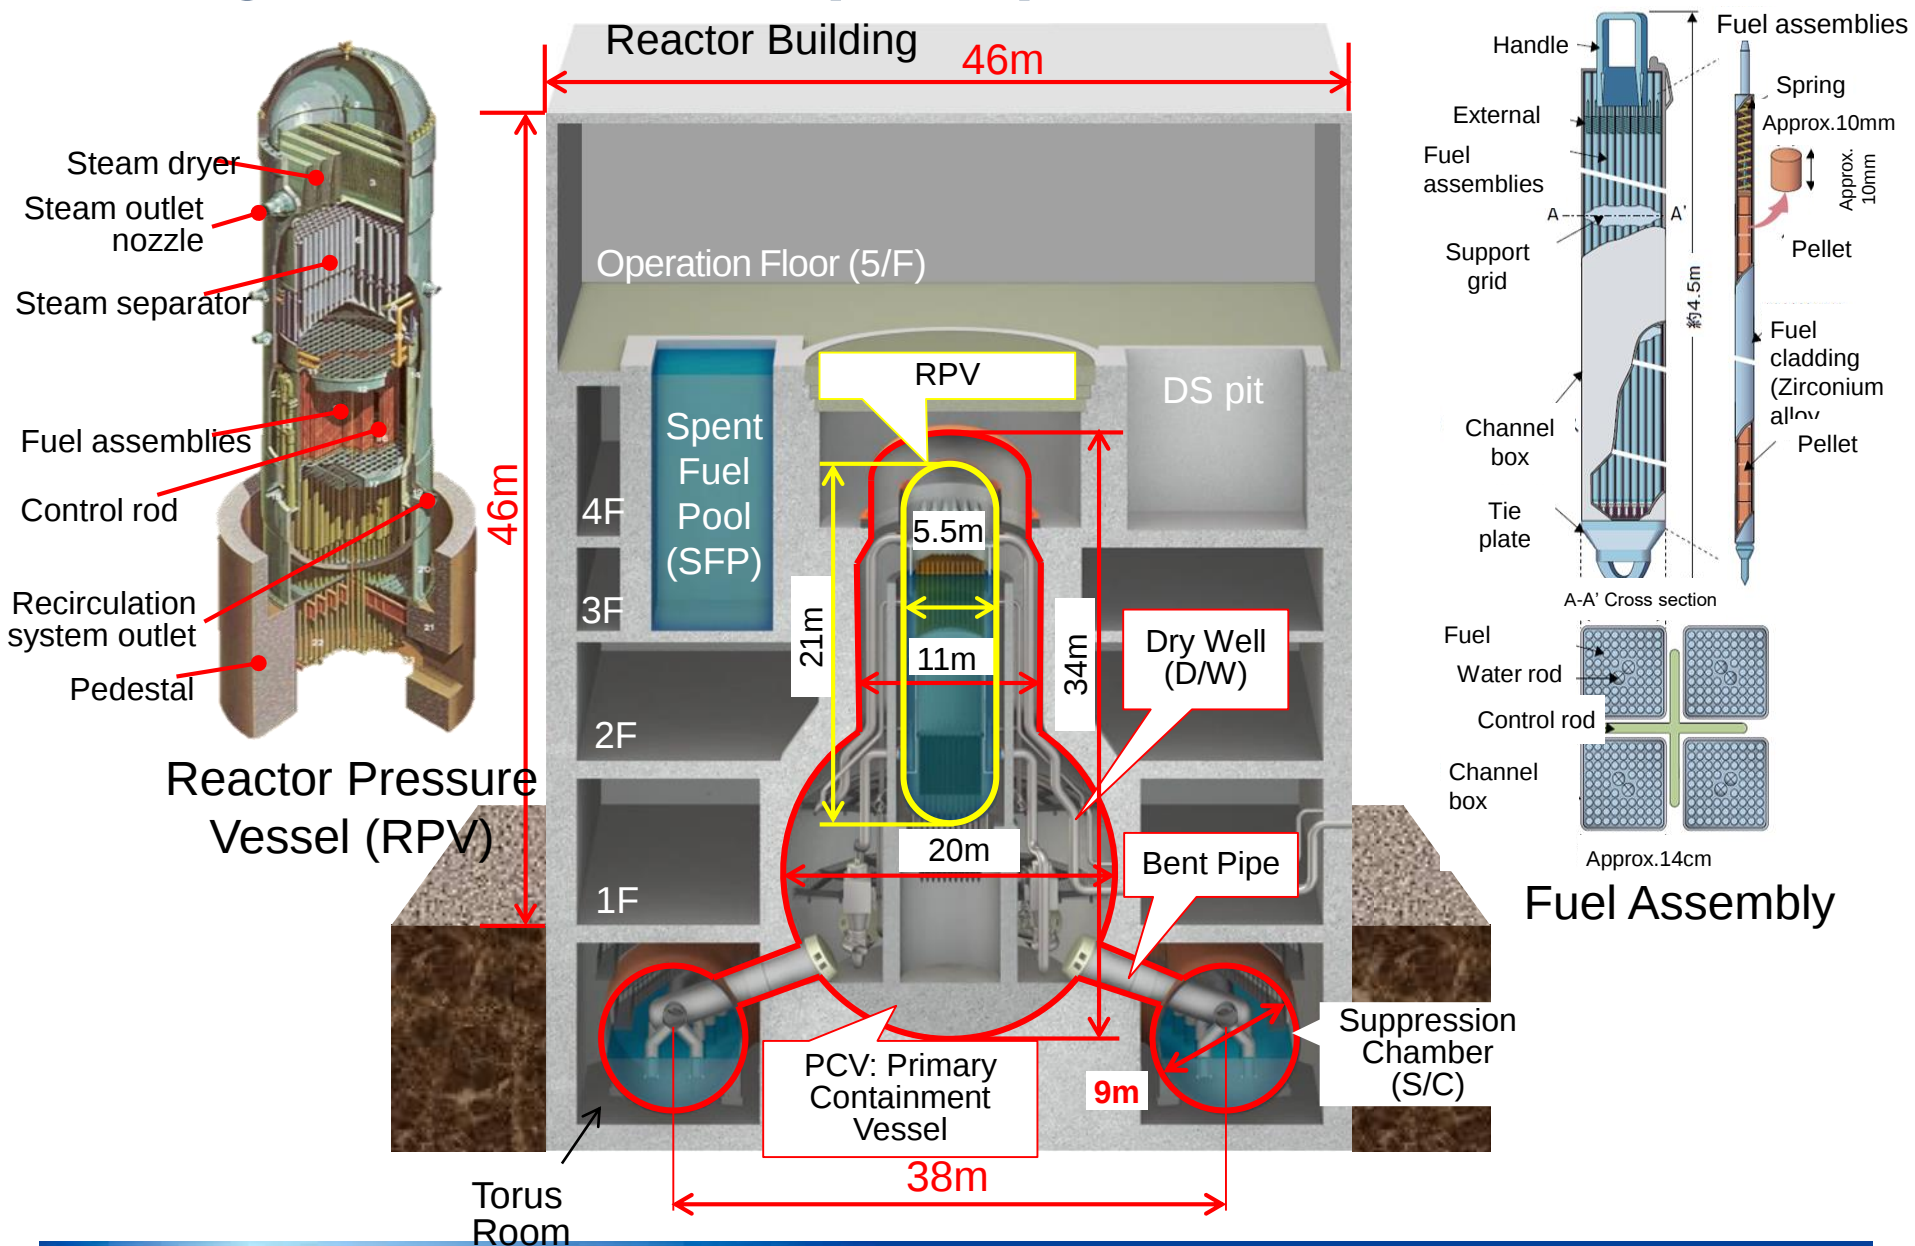

Appearance of Primary Containment Vessel (PCV) (Photo of PCV under construction)

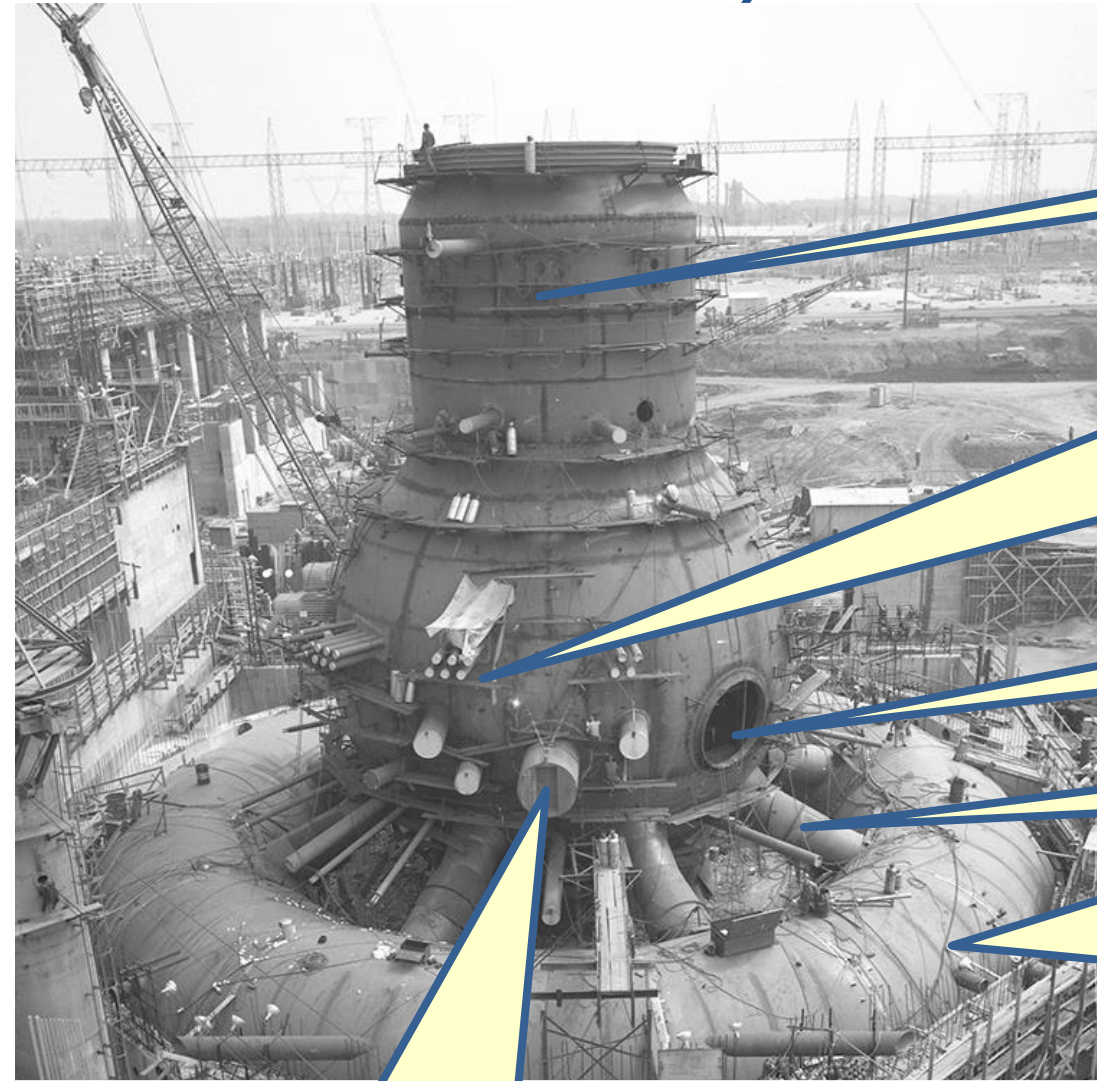

Dry well (D/W): Upper part of PCV above the S/C

PCV penetration : Penetrations of piping and electric wiring, etc.
Unit 1: Approx. 150 penetrations
Unit 2: Approx. 200 penetrations
Unit 3: Approx. 190 penetrations

Equipment hatch: Carry-in/out port of large equipment

Vent pipe: Connection pipe between D/W and S/C

Suppression Chamber (S/C): The S/C condenses water vapors generated when an accident occurs to suppress the increase of pressure in PCV.

Air lock: Entrance and exit for humans

"Browns Ferry Unit 1 under construction 1966.Sep."
Tennessee Valley Authority – TVA's 75th Anniversary webpage

Outline of IRID

1. Name

International Research Institute for Nuclear Decommissioning
(IRID)

<https://irid.or.jp/en/>

2. Date of Establishment

August 1, 2013

3. Membership (19 organizations)

2 research institutes


JAEA etc.

4 manufacturers

Toshiba ESS, Hitachi-GE, MHI etc.

12 electric utilities, etc.

TEPCO Holdings etc.

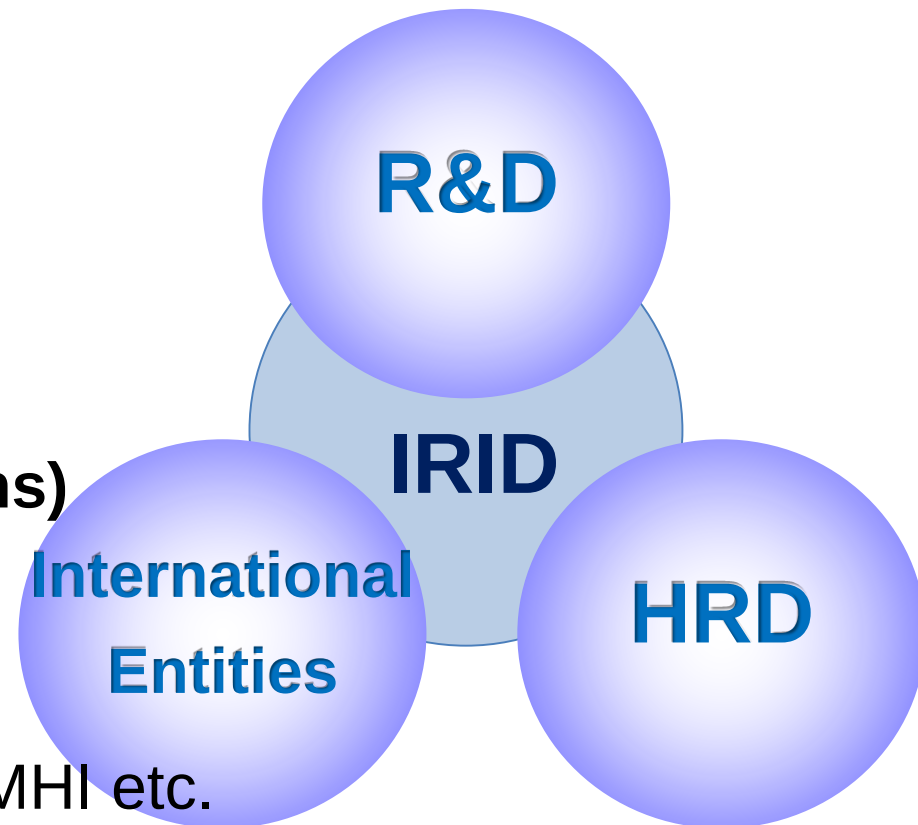

Introduction: R&D projects conducted by IRID

1. R&D for fuel removal from spent fuel pool

Evaluation of **Long-term Structural Integrity** of Fuel Assemblies Removed from Spent Fuel Pool

Completed in March 2016

3 R&D for Radioactive Wastes

Technology for **Proceeding Process Methods** of Radioactive Wastes

Treatment and **Disposal of Solid** Radioactive Wastes

Completed in March 2019

2 R&D for Fuel Debris Retrieval

Technology for Decontamination and Dose

Reduction
Remotely Operated Decontamination Technology in R/B

Completed in March 2016

Fuel Debris Retrieval Technology

Retrieval Technology for Fuel Debris and Internal Structure:
Criticality Control/Fundamental Technology/ Small Neutron Detector

Completed in March 2019

Development of Retrieval Technology and Method For fuel debris and Internal Structures

Dust collection System for Retrieval of Fuel debris and Internal structures

Technology for **Containment, Transfer And Storage** of Fuel Debris

Development of Safety System for fuel Debris retrieval

Technology for Environmental Improvement

<Ensuring of the stable state>

Corrosion Control Technology in RPV/PCV

Completed in March 2018

Full-scale test for Repair Technology for PCV Leak Points

Completed in March 2018

Full-scale Test for Water Circulation Technology in PCV

Completed in March 2019

Investigation and Analysis Technology

<Indirect Investigation>

<Direct Investigation>

Fuel debris detection Technology for RPV

Completed in March 2018

Upgrading for **Identifying Conditions** Inside the Reactor

Completed in March 2018

Technology for **Detailed Investigation** Inside PCV

Completed in March 2019

Investigation Technology Inside the RPV

PCV detailed Investigation: **Demonstration Through X-6 penetration**

PCV Detailed Investigation: **Demonstration of Sediments**

Fuel Debris Sampling Technology and Analysis

Fuel Debris /Increase of Retrieval Scale for Fuel Debris

Contents


1. Introduction
- 2. Development of Remotely Operation Equipment for Dose Reduction**
3. Development of Repairing Technology for PCV
4. Development of Investigation Technology for inside PCV
5. Development of Technology for Fuel Debris Retrieval
6. Nuclear Safety Enhancement

PCV : primary containment vessel

Remote Decontamination Technology

Needs for technological development

Humans cannot access the R/B because radiation levels are high in the R/B. It is necessary **to improve work environments (dose reduction).**

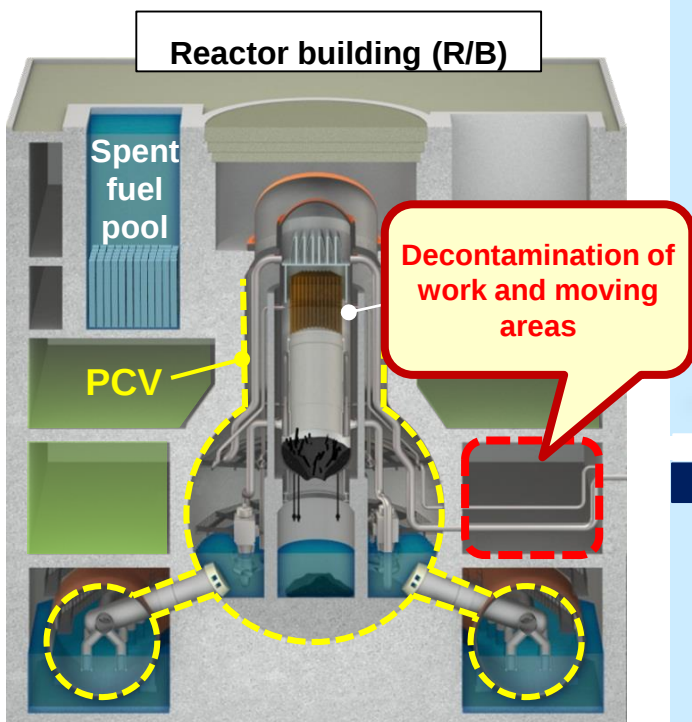

For low places (floors and lower part of walls)



Suction and blast




High pressure water injection




Dry ice blast

For high places

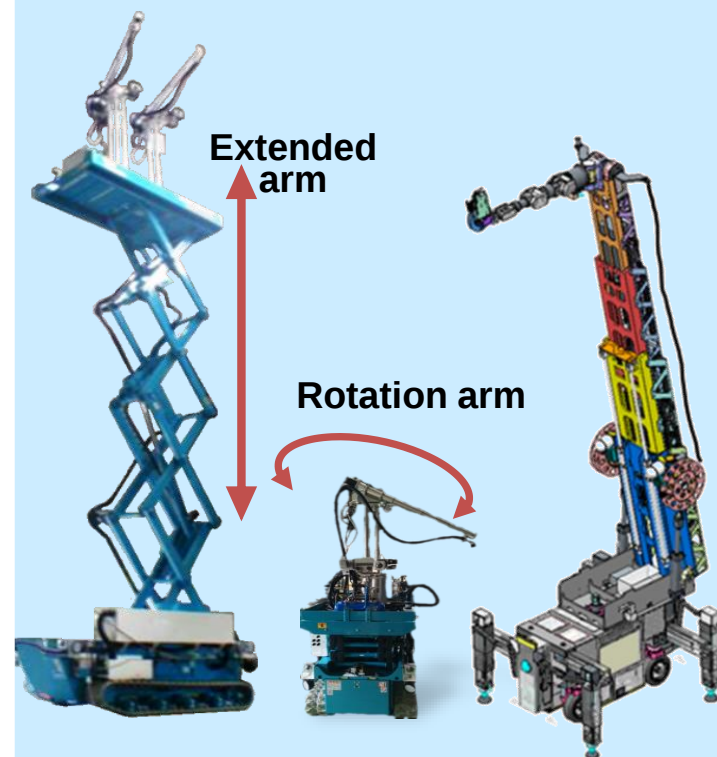

For upper floors

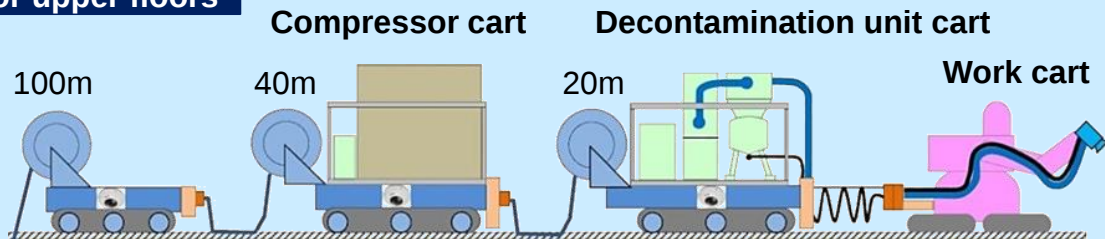


Remote Decontamination Technology

Site application (Unit 3)

Suction and dry ice blast decontamination was performed on 1st floor of the **Unit 3 R/B** from January 2016 to February 2016.

 : Suction  : Dry ice blast

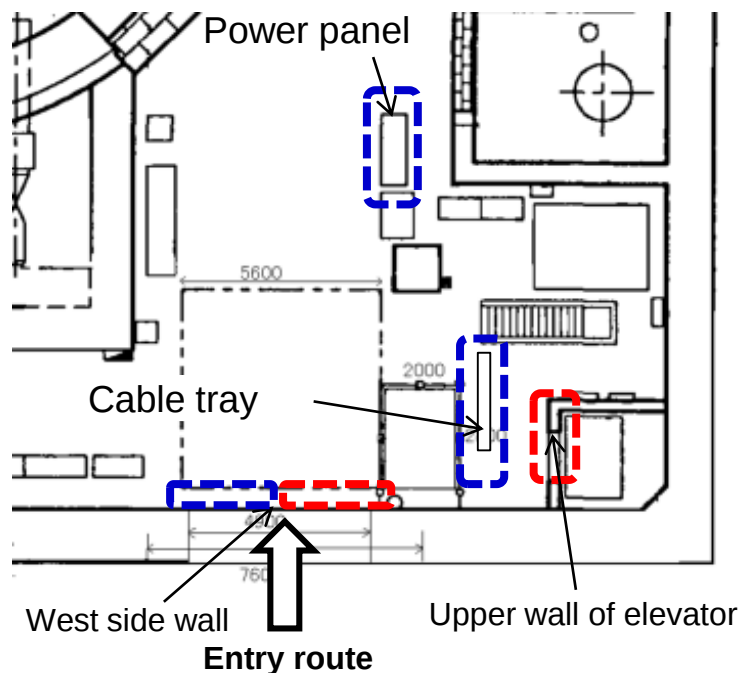

Photos of transporting decontamination equipment from a container



Photo of decontamination equipment moving to the Unit 3 R/B

Contents

1. Introduction
2. Development of Remotely Operation Equipment for Dose Reduction
- 3. Development of Repairing Technology for PCV**
4. Development of Investigation Technology for inside PCV
5. Development of Technology for Fuel Debris Retrieval
6. Nuclear Safety Enhancement

PCV : primary containment vessel

Repair Technology to Stop Water Leaks from Primary Containment Vessel (PCV)

Test for stopping water leaks from vent pipe



Vent pipe


Water stop performance was verified by using the 1/2 scale test facility (in factory).

Test for stopping water leaks




Material to stop leakage

Water stop performance of the material was verified by using the full-scale test facility (outdoor).

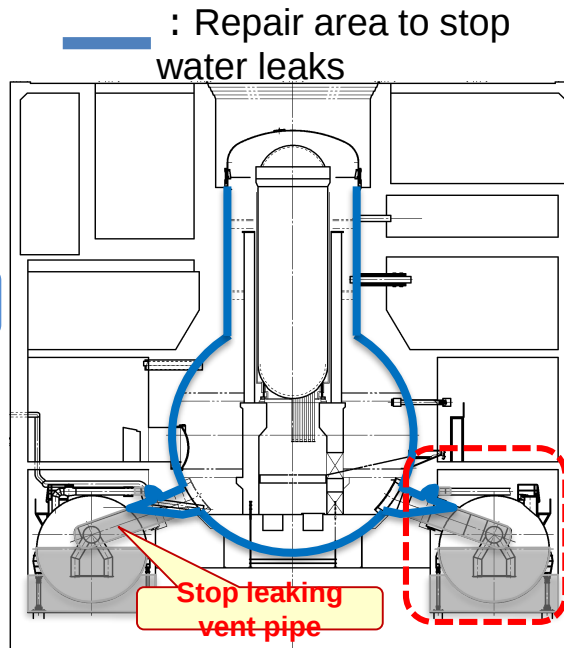

: Repair area to stop water leaks

Stop leaking vent pipe

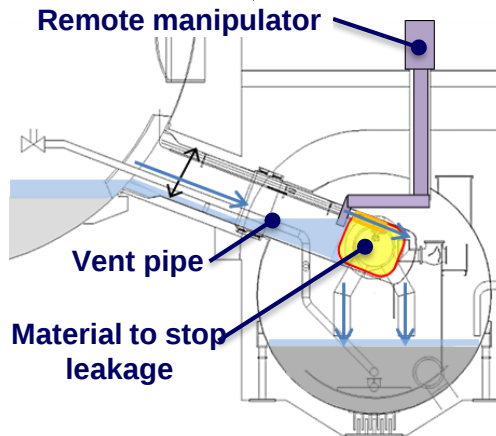


Remote manipulator

Vent pipe

Material to stop leakage

Full-scale mock-up test

Full-scale mock-up test facility (1/8 sector)

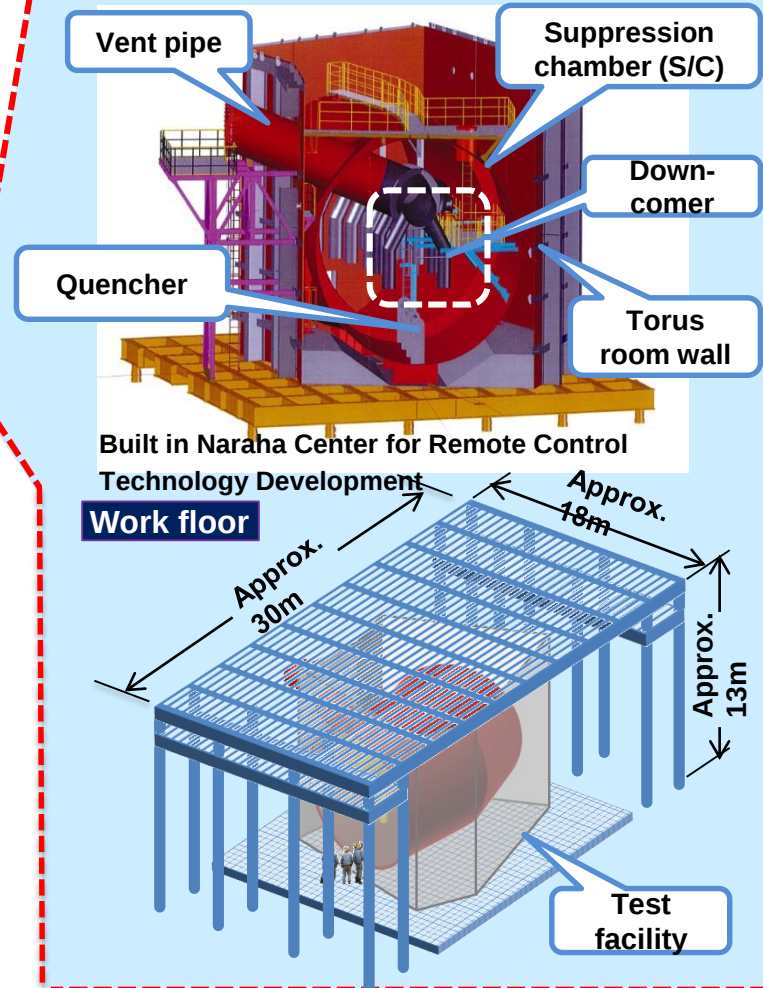

Vent pipe

Suppression chamber (S/C)

Down-comer

Quencher

Torus room wall

Built in Naraha Center for Remote Control Technology Development

Work floor

Approx. 30m

Approx. 18m

Approx. 13m

Test facility

Confirmation of Procedures for Full-scale Test Facility (JAEA Naraha Center for Remote Control Technology Development)

Purpose

- Creating of procedure manual by using a full-scale test facility considering actual onsite work to **determine the applicability of the actual equipment.**



Major work

- The procedures of the following three methods for water stops are tested to verify workability and performance of concrete placing.
 - ① Stop water leaks from vent pipes
 - ② Stop water leaks in the S/C by injecting filling
 - ③ Strengthen the S/C support column

Test period

Nov. 2016 – March 2018




Appearance of test facility



Inside of the test facility (in the S/C)



Verification test of workability to strengthen the S/C support column

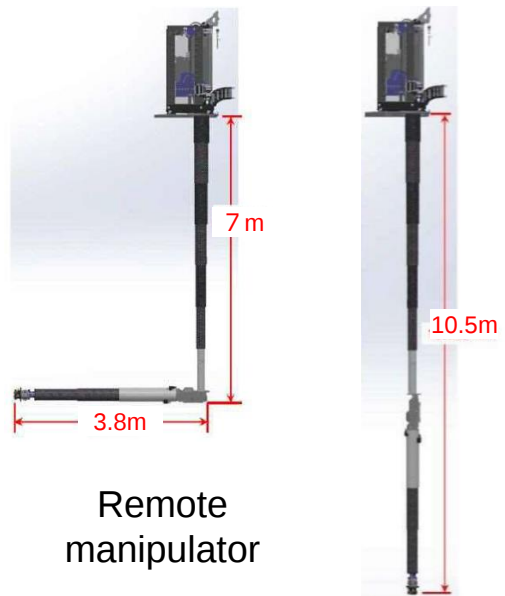

Remote manipulator

Contents

1. Introduction
2. Development of Remotely Operation Equipment for Dose Reduction
3. Development of Repairing Technology for PCV
- 4. Development of Investigation Technology for inside PCV**
5. Development of Technology for Fuel Debris Retrieval
6. Nuclear Safety Enhancement

PCV : primary containment vessel

Muon Transmission Measurement

- Muons are secondary cosmic rays, which generate when radiation from space collides with the atmosphere of the Earth. The cosmic ray muons are high-energy particles and can pass through materials.
- Muon tomography can measure the number of muons that pass through the reactor building to image the density of materials such as X-ray. It can be used to image the distribution of fuel debris in the reactor pressure vessel (RPV). (Smaller number of muons will pass through high density regions so higher density regions show dark shadow).

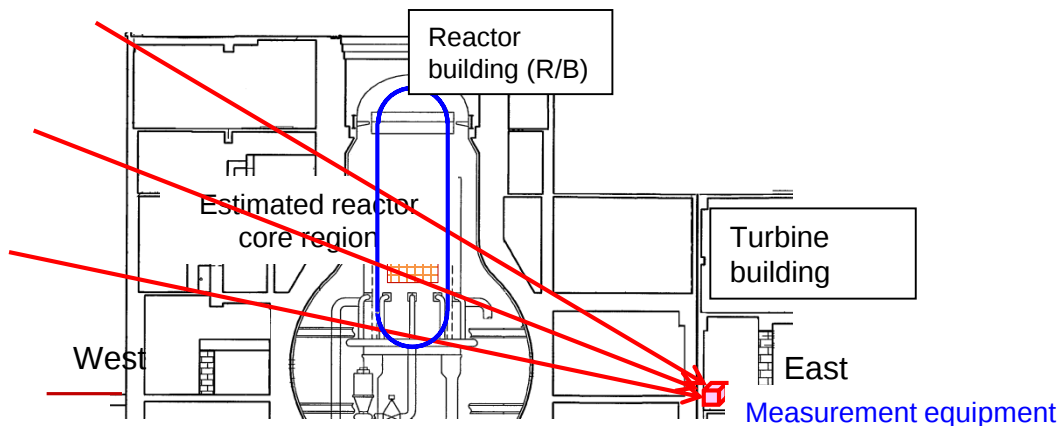


Illustration of measuring muons passing through the reactor building (horizontal cross section)


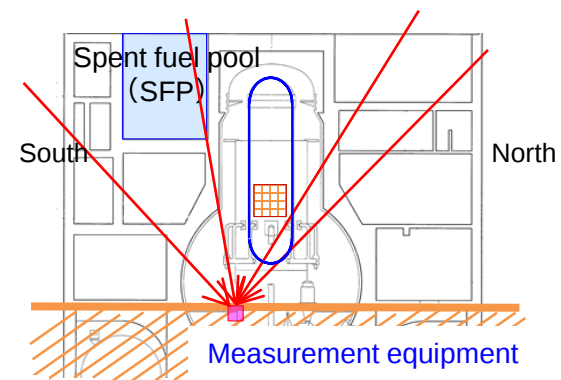


Illustration of measuring muons passing through the reactor building (vertical cross section)


<Measurement principle of the muon transmission method (illustration)>

Two panel detectors (plastic scintillator) that are placed in the measurement equipment can detect muons falling from space and calculate their trace on where they have passed through from the coordinates (X and Y axes) on the panel.

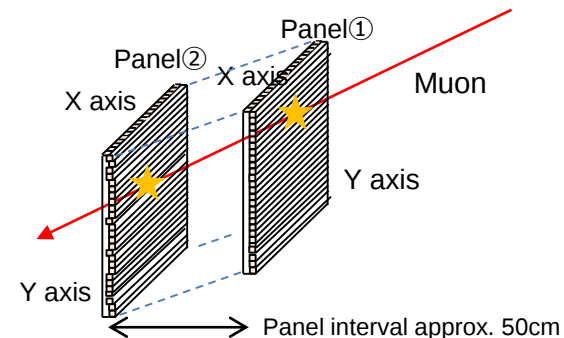

Measurement Result of the Muon Transmission Method for Unit 3


(As of September 8, 2017)

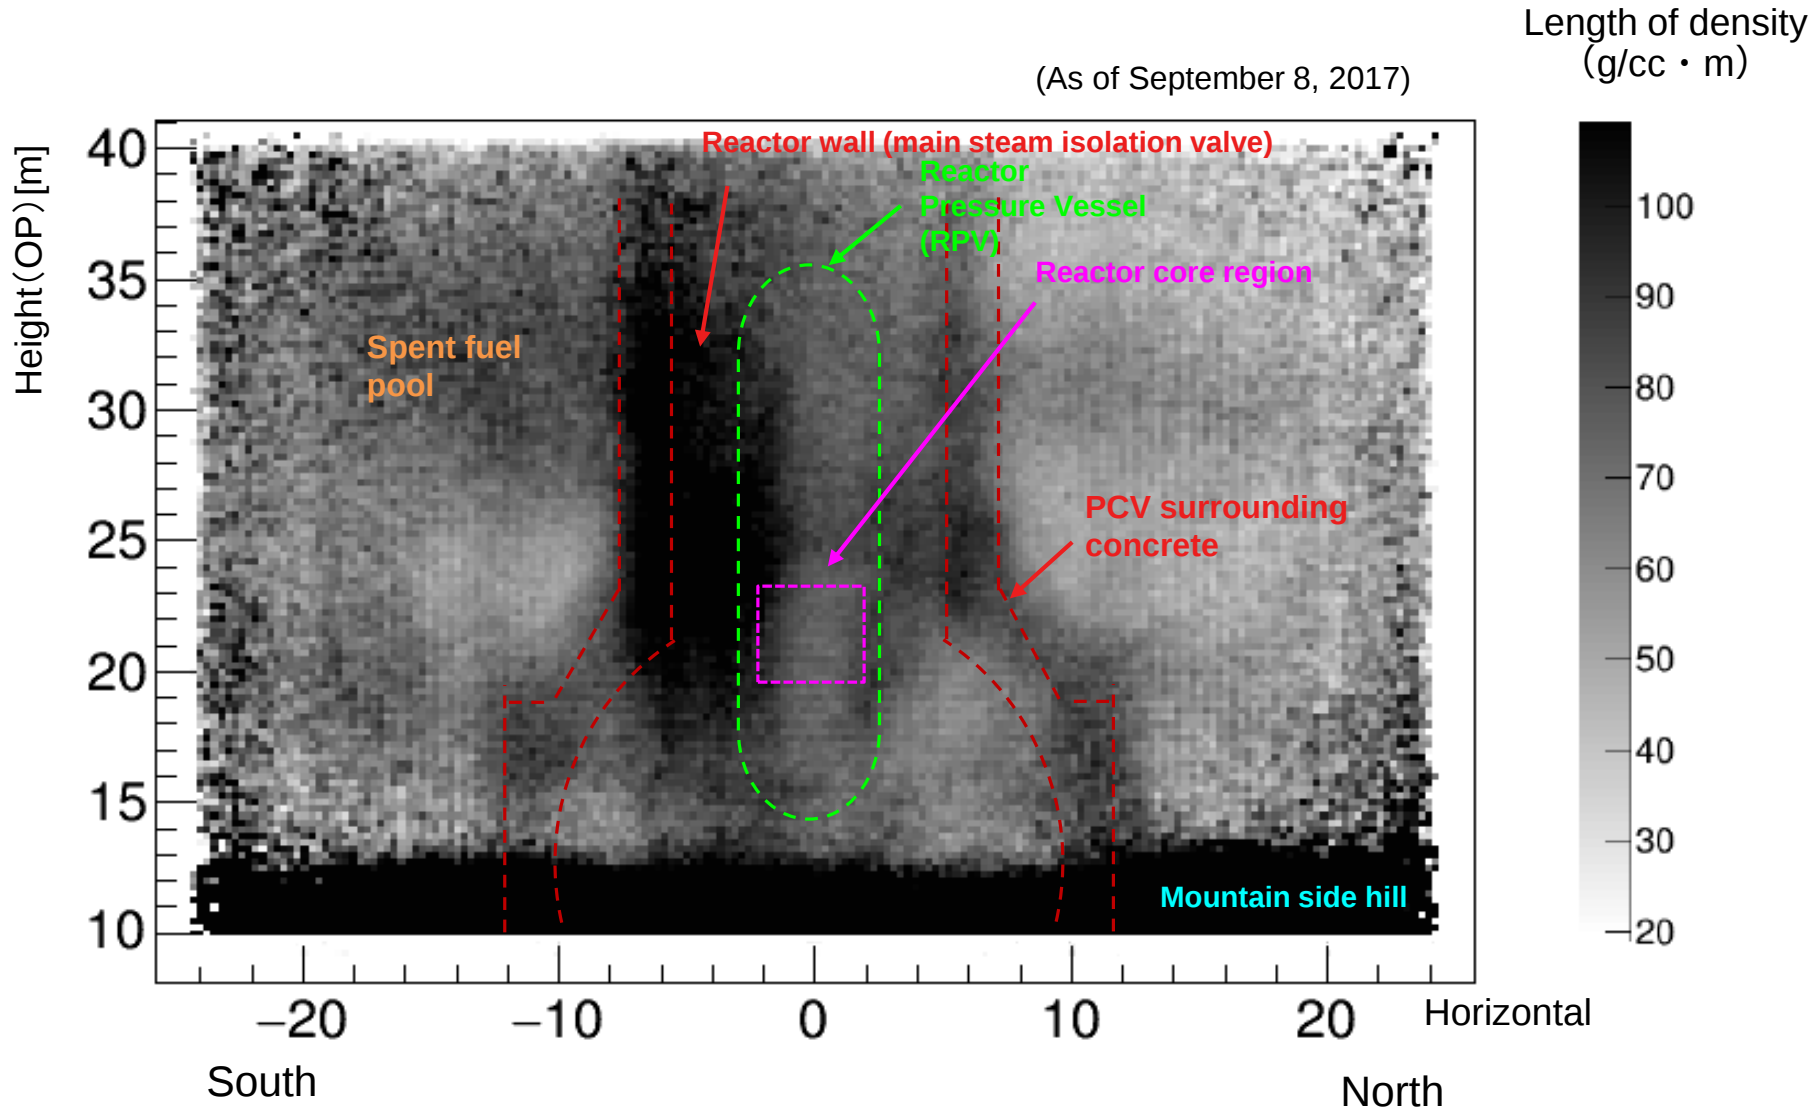


Quoted from report released from the TEPCO Holding Inc. website.

Robot Investigation of the PCV interiors


Investigation of outside the pedestal (Unit 1)

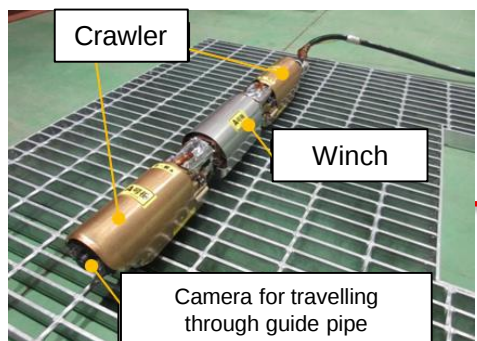

Type I (when travelling through guide pipe)

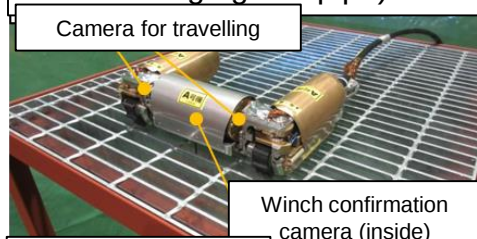


U-shape type (when travelling on the floor)

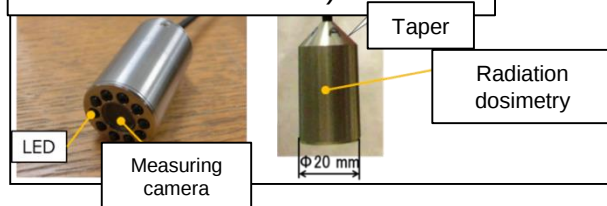


Investigation of inside the pedestal (Unit 2)

○ Remote-operated crawler robot for investigation

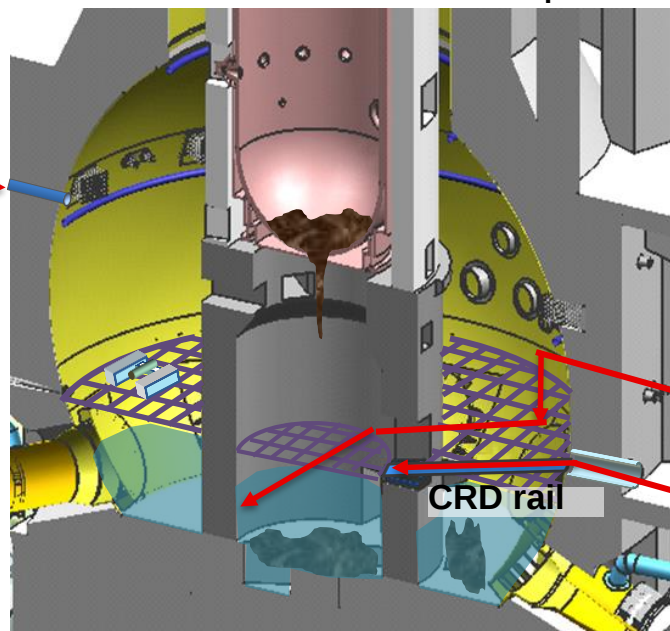

During investigation

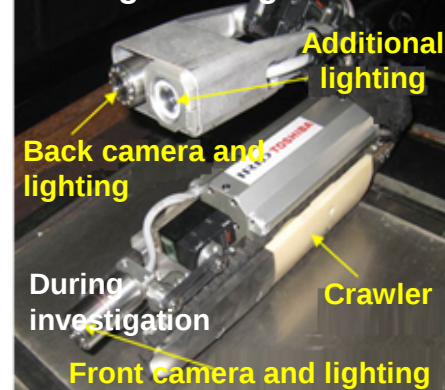


○ Suspension type investigation equipment (A2' investigation)

Investigation of inside the pedestal (Unit 3)

Thruster for up-and-down


Front camera

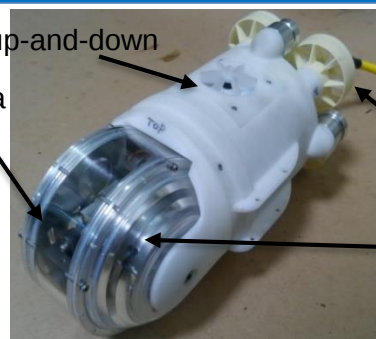

○ Submersible Crawling Robot



Unit 1 investigation: Radiation dose and visual images

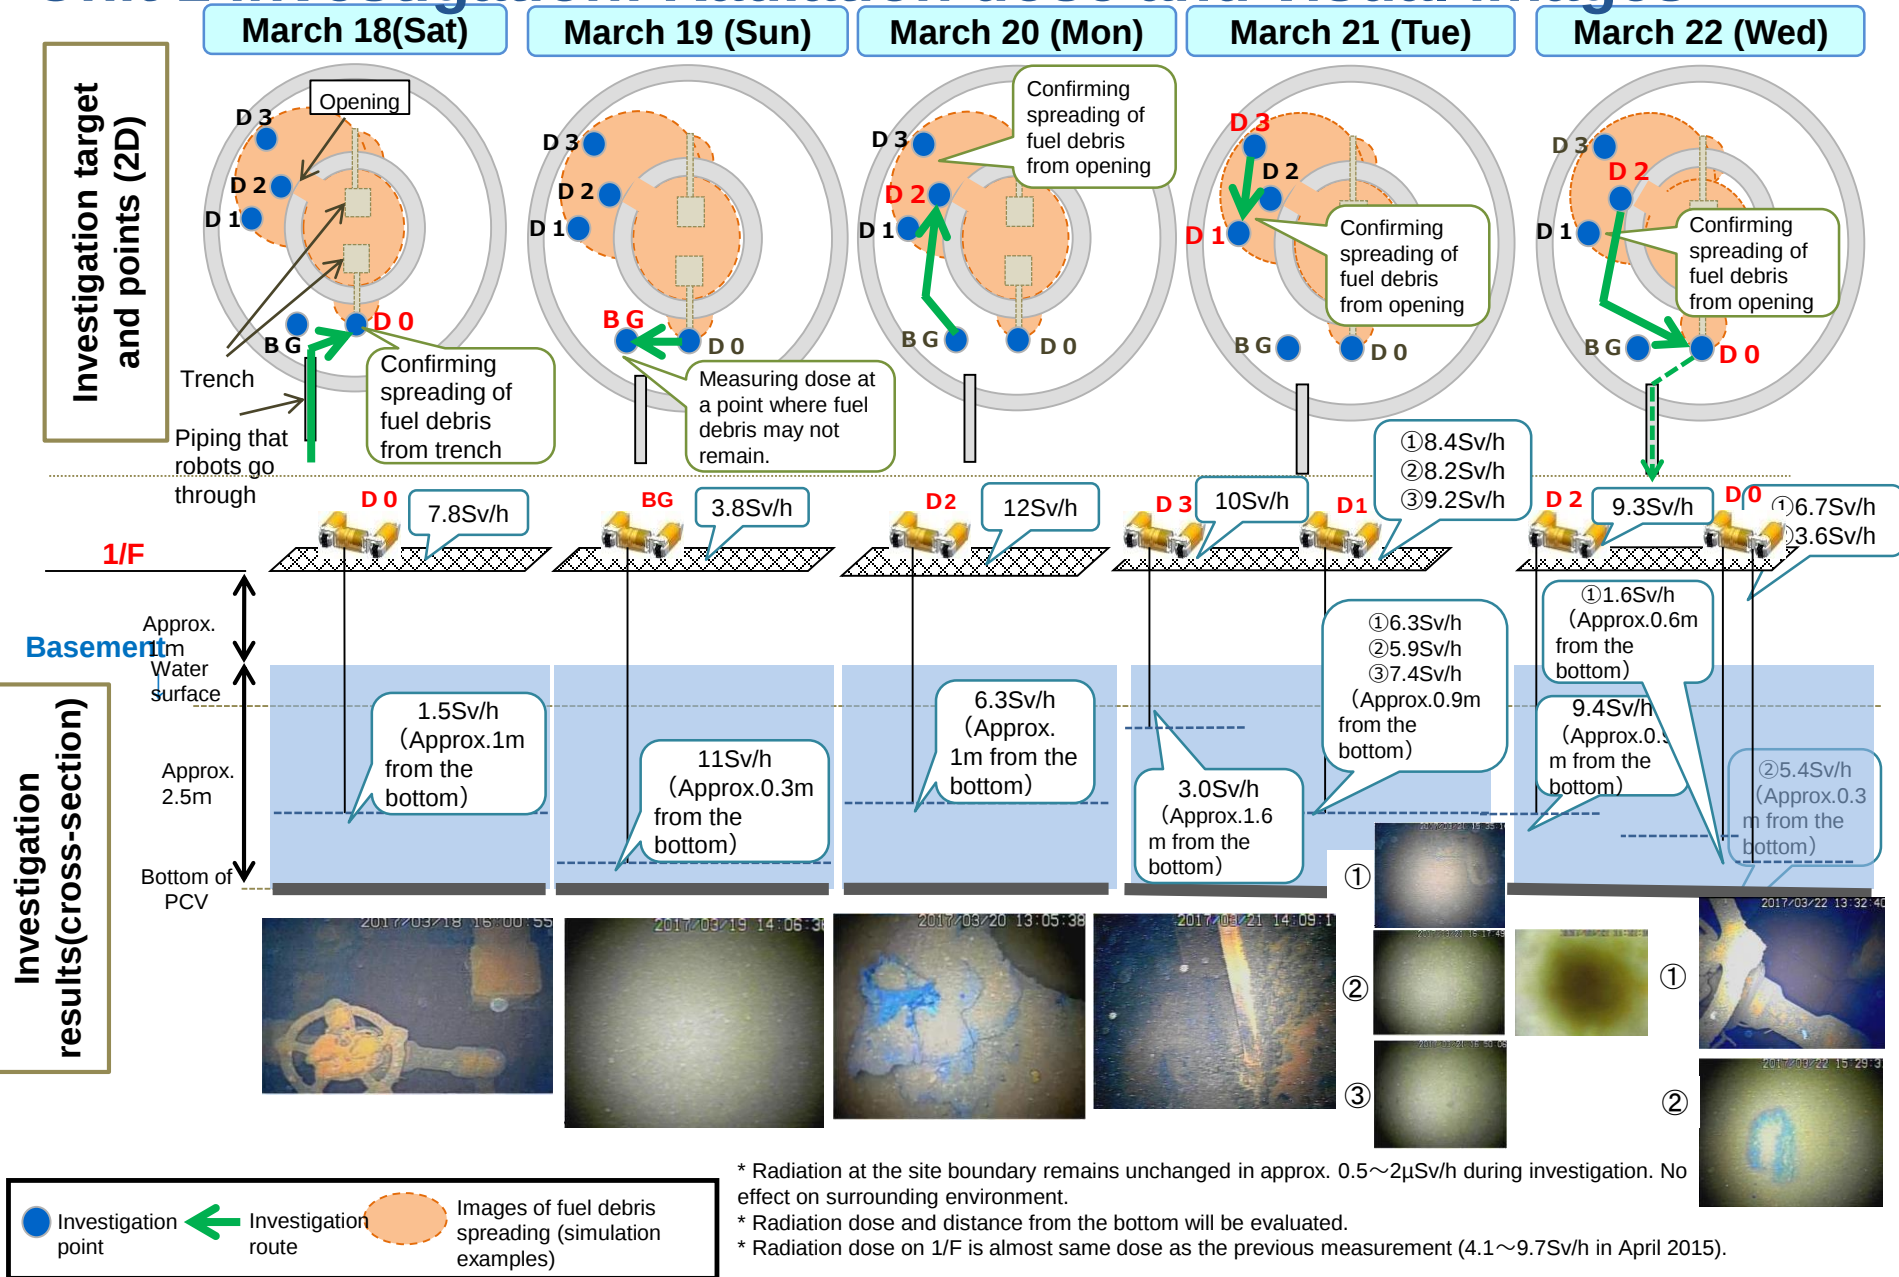

Investigation of the Unit 2 upper pedestal interior

(A2 investigation: January – February 2017)

【Investigation method】

- Photographing by camera

【Implementation period】

- Jan. – Feb. 2017

Pre-confirmation for the penetration interior

Investigation procedure

1. Pre-confirmation for the pedestal interior

Conducted on 30 Jan. 2017


2. Removal of deposition on the rail

Conducted on 9 Feb. 2017


3. A2 investigation

Conducted on 16 Feb. 2017



1. Pre-confirmation system

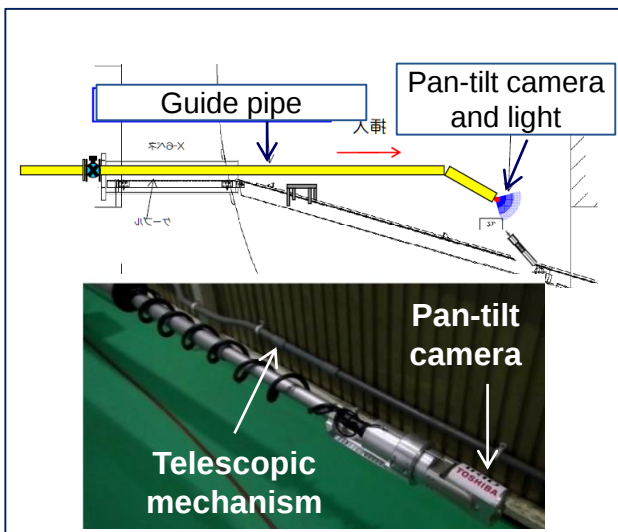

2. Deposition removal equipment

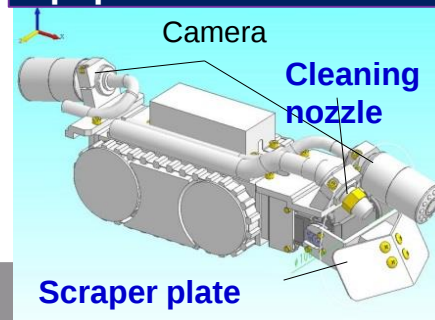

3. A2 investigation equipment

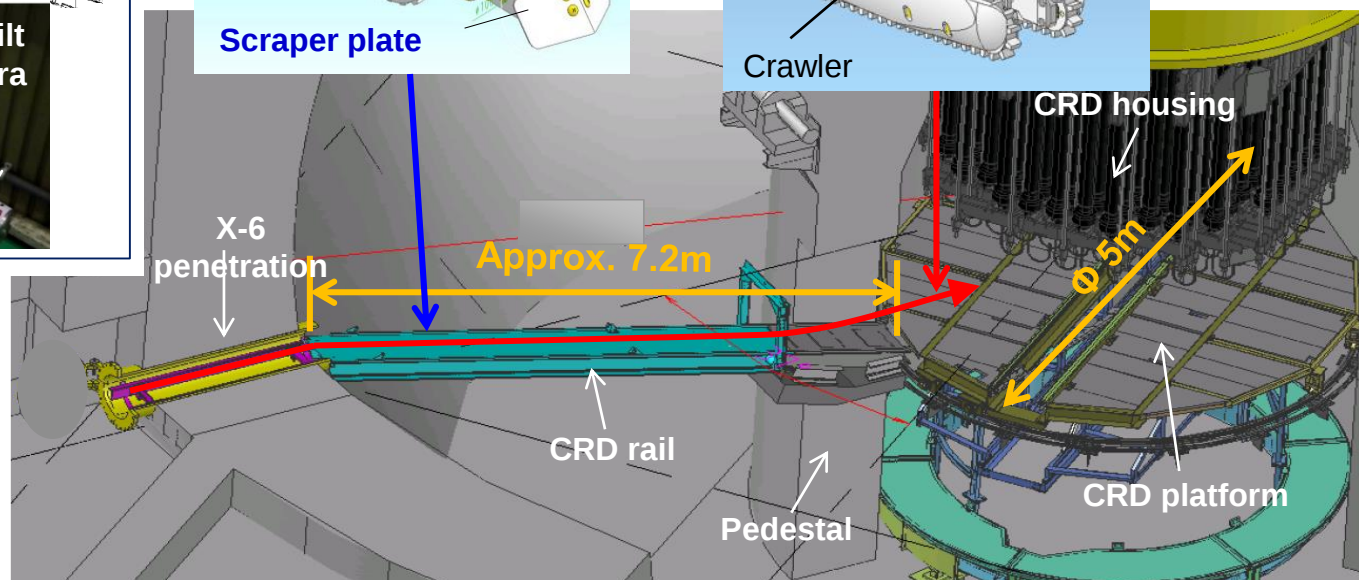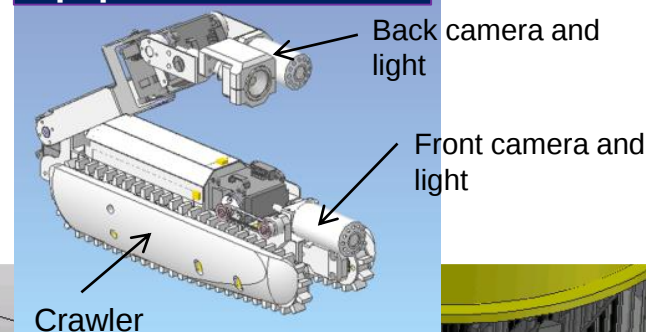

Investigation of the Unit 2 upper pedestal interior

(A2 investigation: January – February 2017)

Upper pedestal interior (after image processing)



Investigation of the lower pedestal interior


(A2' investigation in January 2018)

■ Purpose of investigation


Confirmation of the state below the platform

■ Investigation procedure

- ① Inserting a guide pipe ⇒
- ② Extending a pipe ⇒
- ③ Suspending a pan-tilt camera ⇒
- ④ Investigation

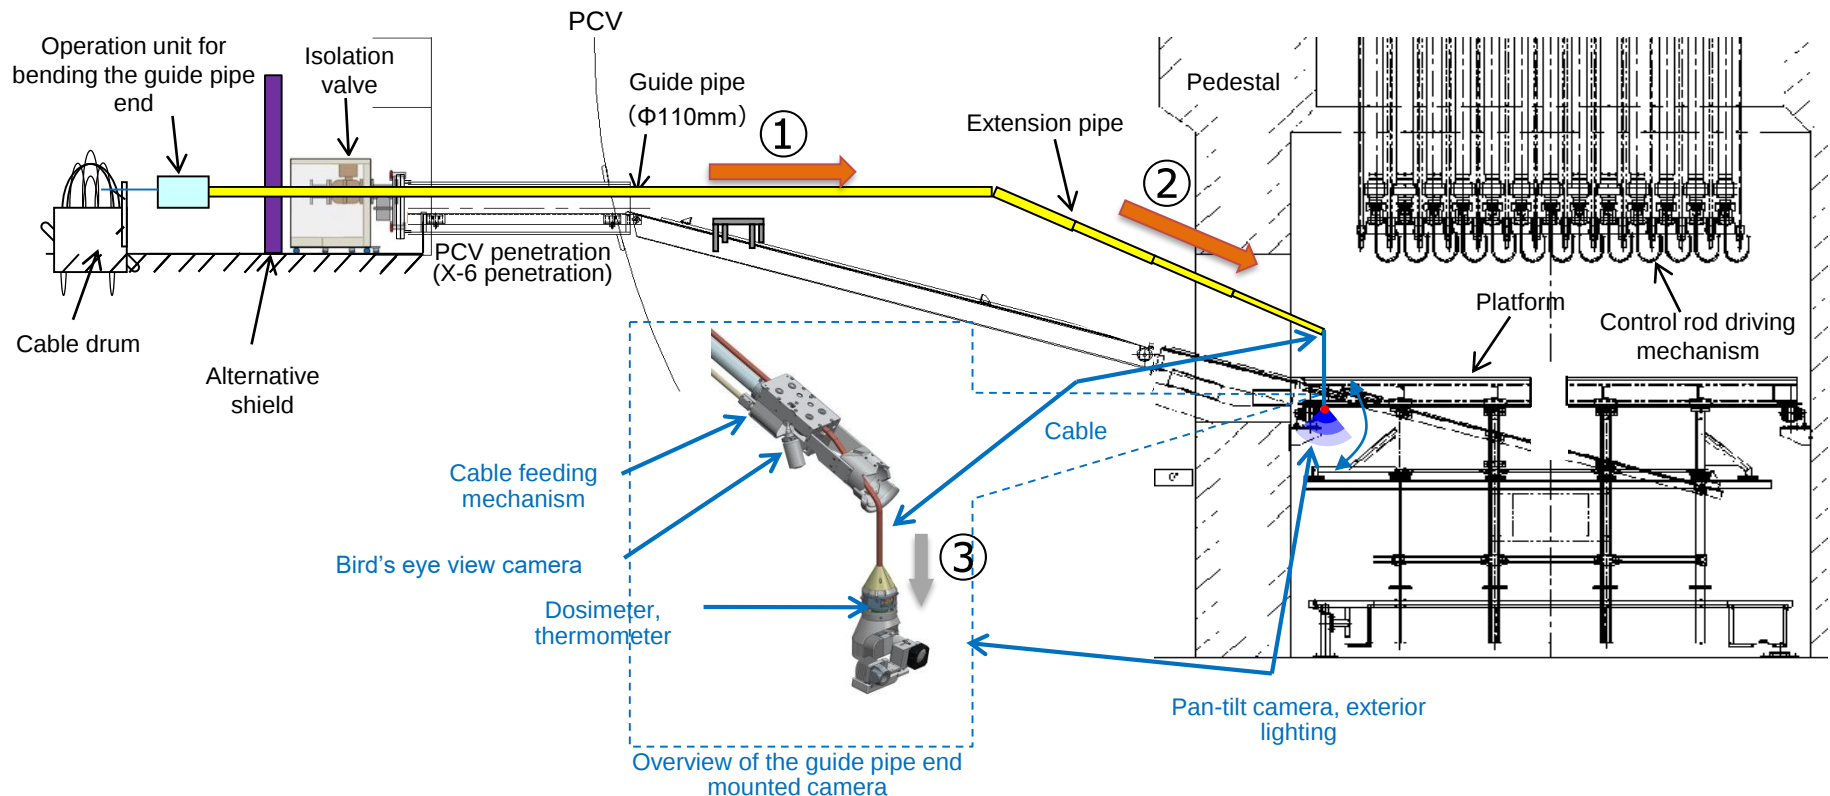



Unit 2 investigation: Pedestal Floor

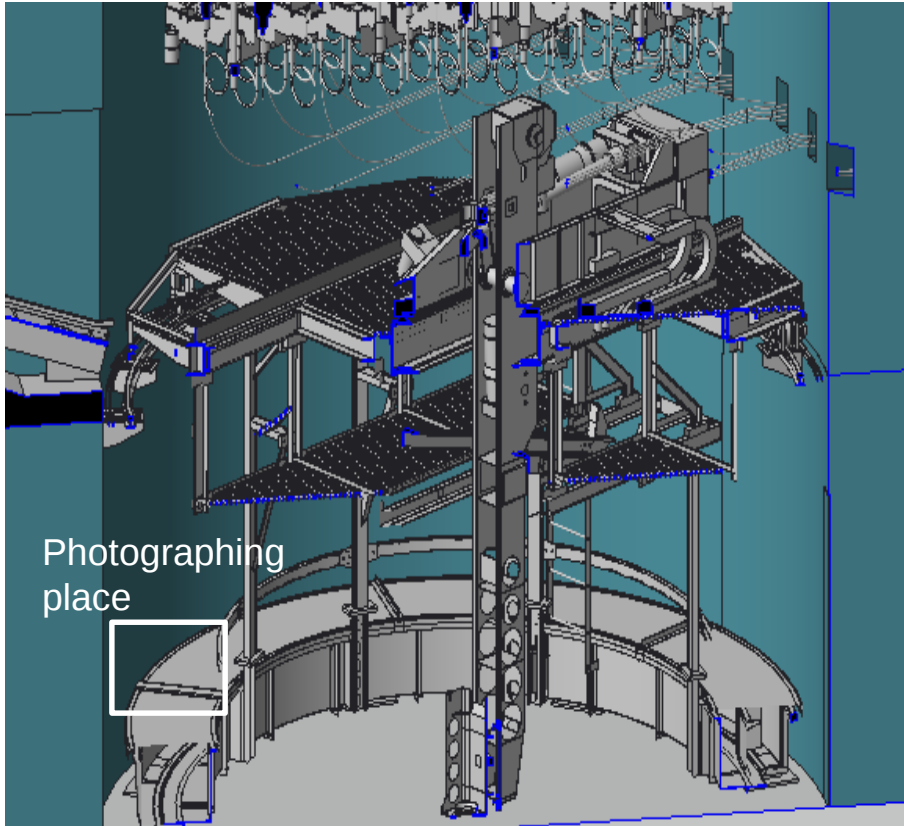


Bottom of the Unit 2 PCV
(An overhead image)

Pedestal floor and wall
Fuel debris? and a fuel assembly handle



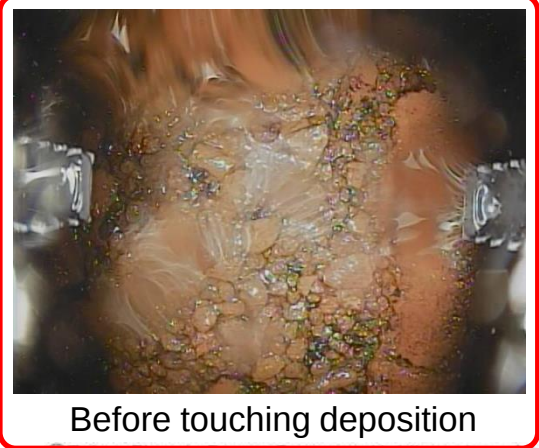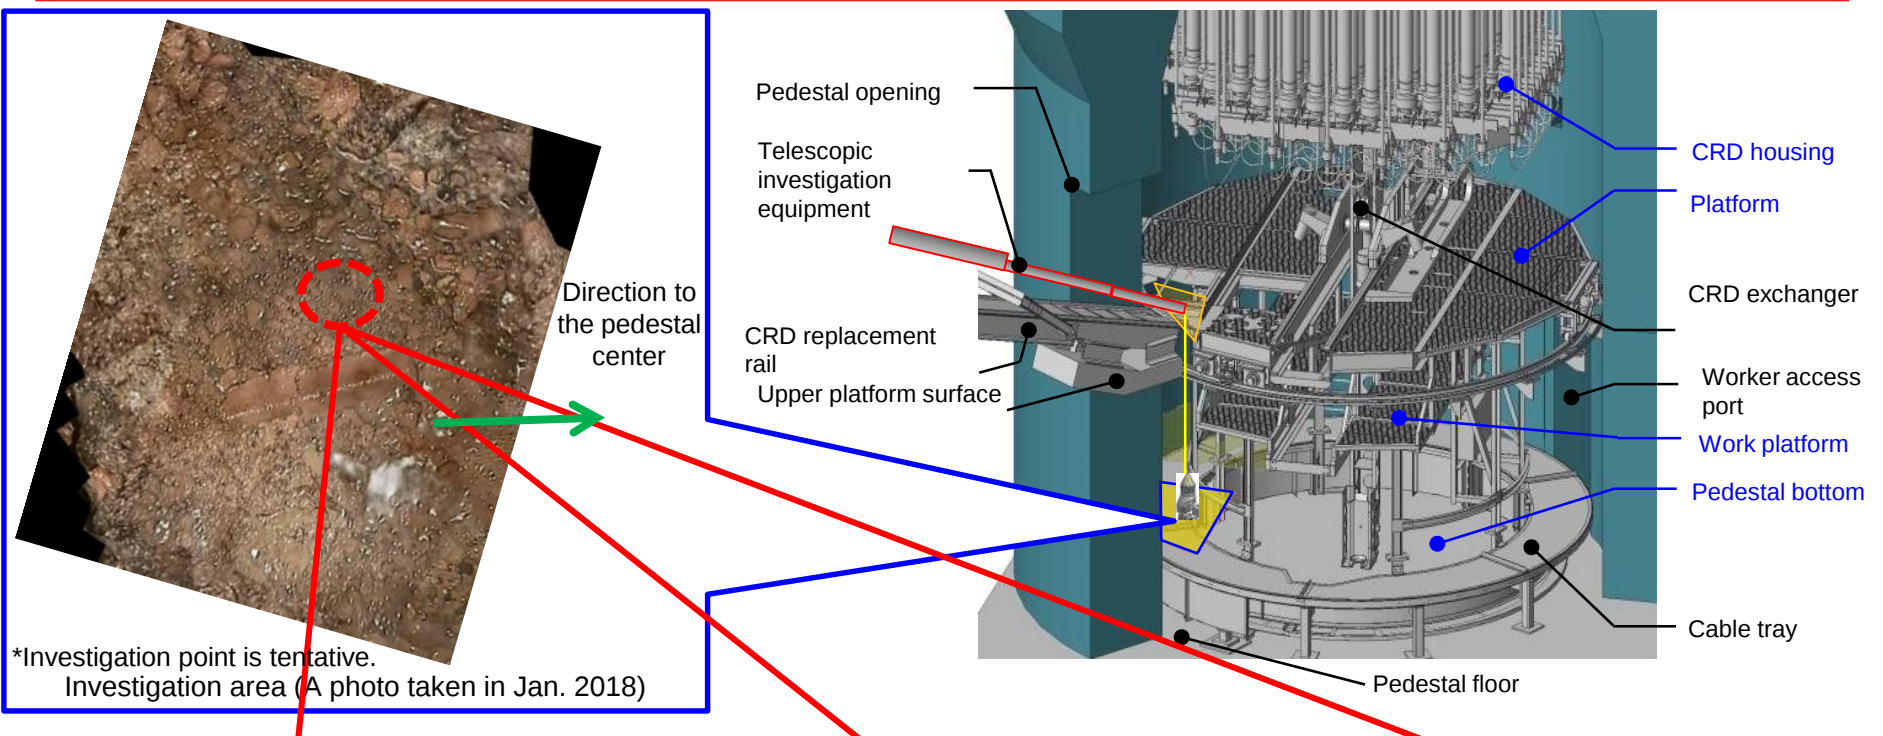

Before touching deposition

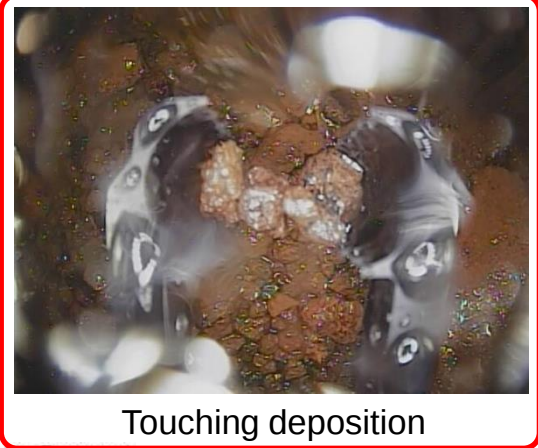


Touching deposition




After touching deposition

Investigation of the Unit 2 Lower Pedestal Interior (A2' investigation in February 2019)

Video: Unit #2 deposition at the lower pedestal area




Submersible Remote Operated Vehicle (ROV) (mockup vehicle)

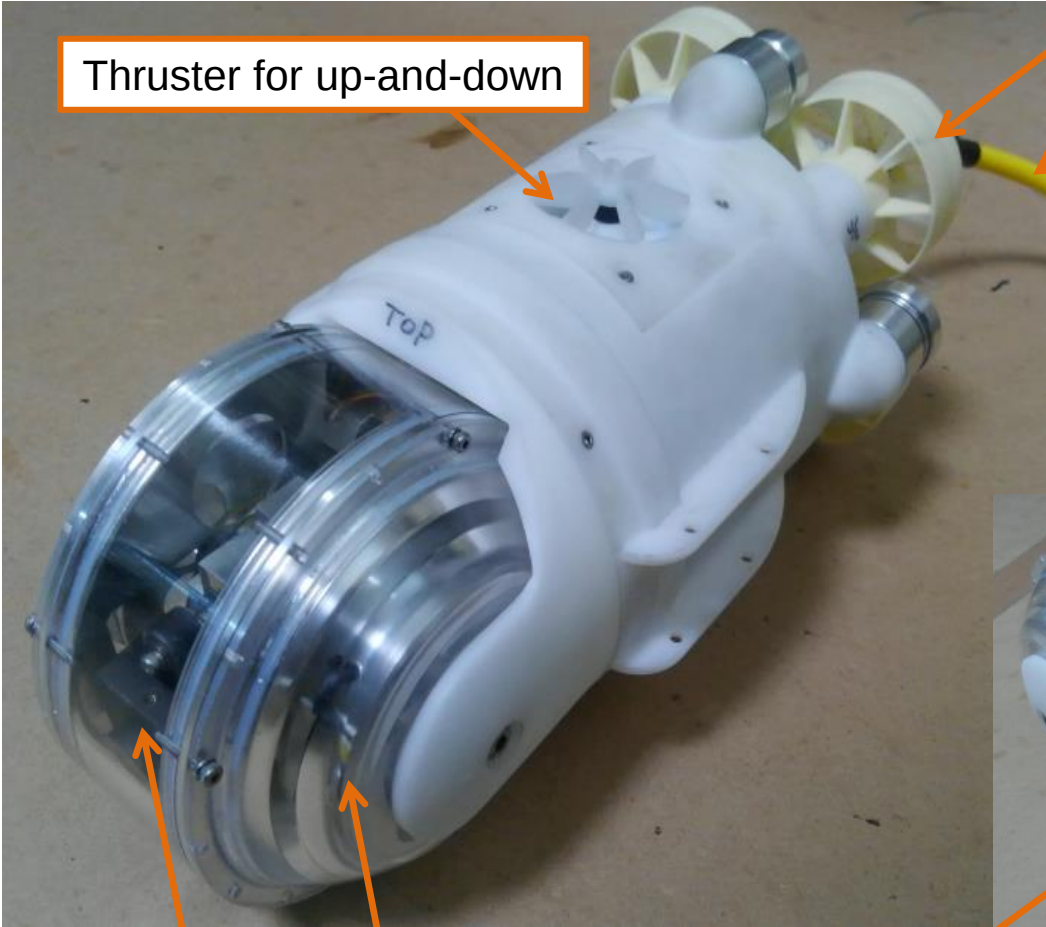

Thruster for driving

Neutral buoyancy cable

Items	Specifications
Outer size	Outer diameter : $\phi 125\text{mm}$ Overall length : Approx.300mm
Weight	Approx. 2000g (in air)
Radiation resistance	200Gy

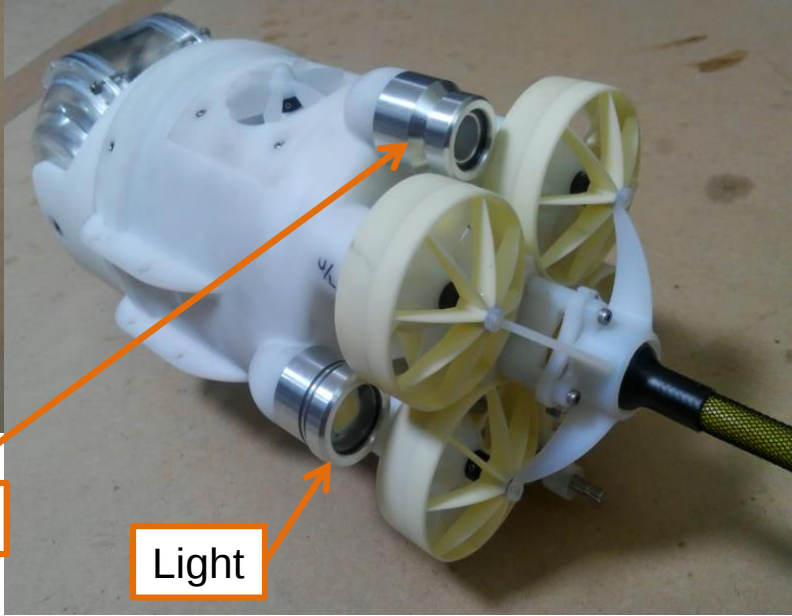

Front camera

Light

Back camera


Light

Results of investigation for the Unit 3 PCV

2. Investigation results

2.3. The lower pedestal

IRID
TEPCO

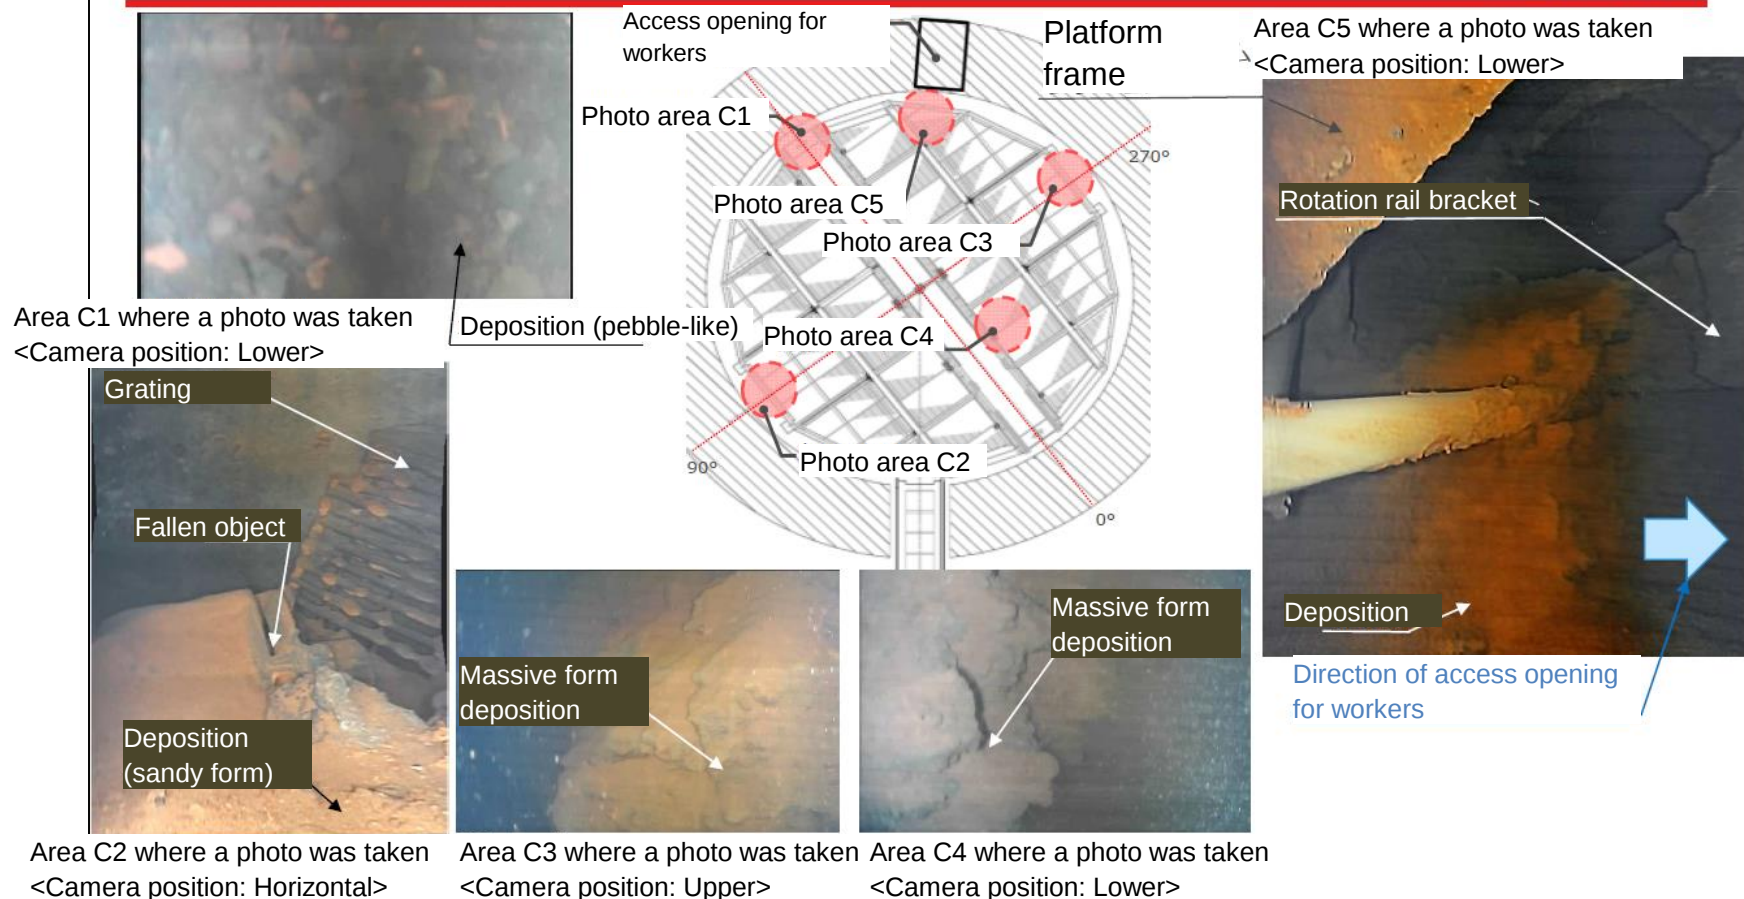


■ The investigation has revealed that deposition in sandy, pebble-like and massive form has accumulated.

■ The access opening for workers was not confirmed visually (deposition was visually seen nearby).

* Reference: Investigation result of the Unit 3 PCV interior (report of the 48th Team Meeting and Countermeasures for Decommissioning and Contaminated Water Treatment Conference on Nov. 30, 2017)

Boat Type Access Equipment



- Boat type access equipment which can move on a wide range of the water surface in the primary containment vessel (PCV) was developed.

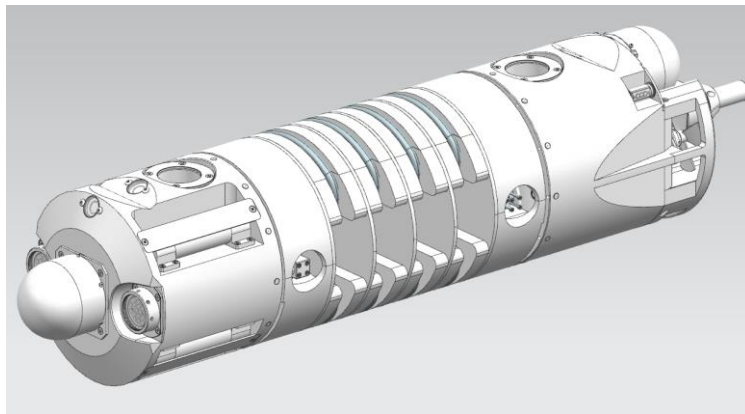

Example: Guide ring installation


- Diameter: $\phi 25\text{cm}$
- Length: Approx. 1.1m
- Thrust: Over 25N

Appearance of the boat type access equipment

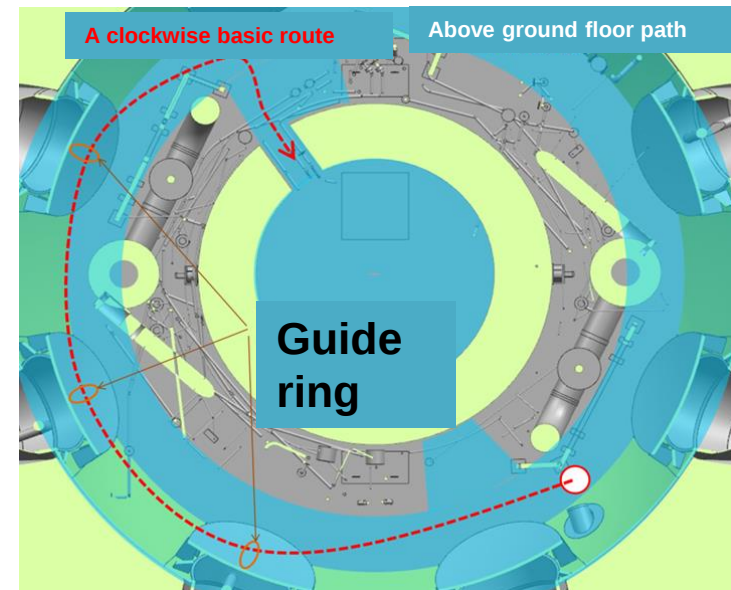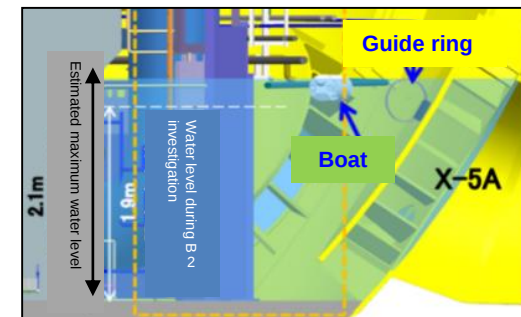


Travelling line of the equipment

Boat Type Access Equipment (Video)

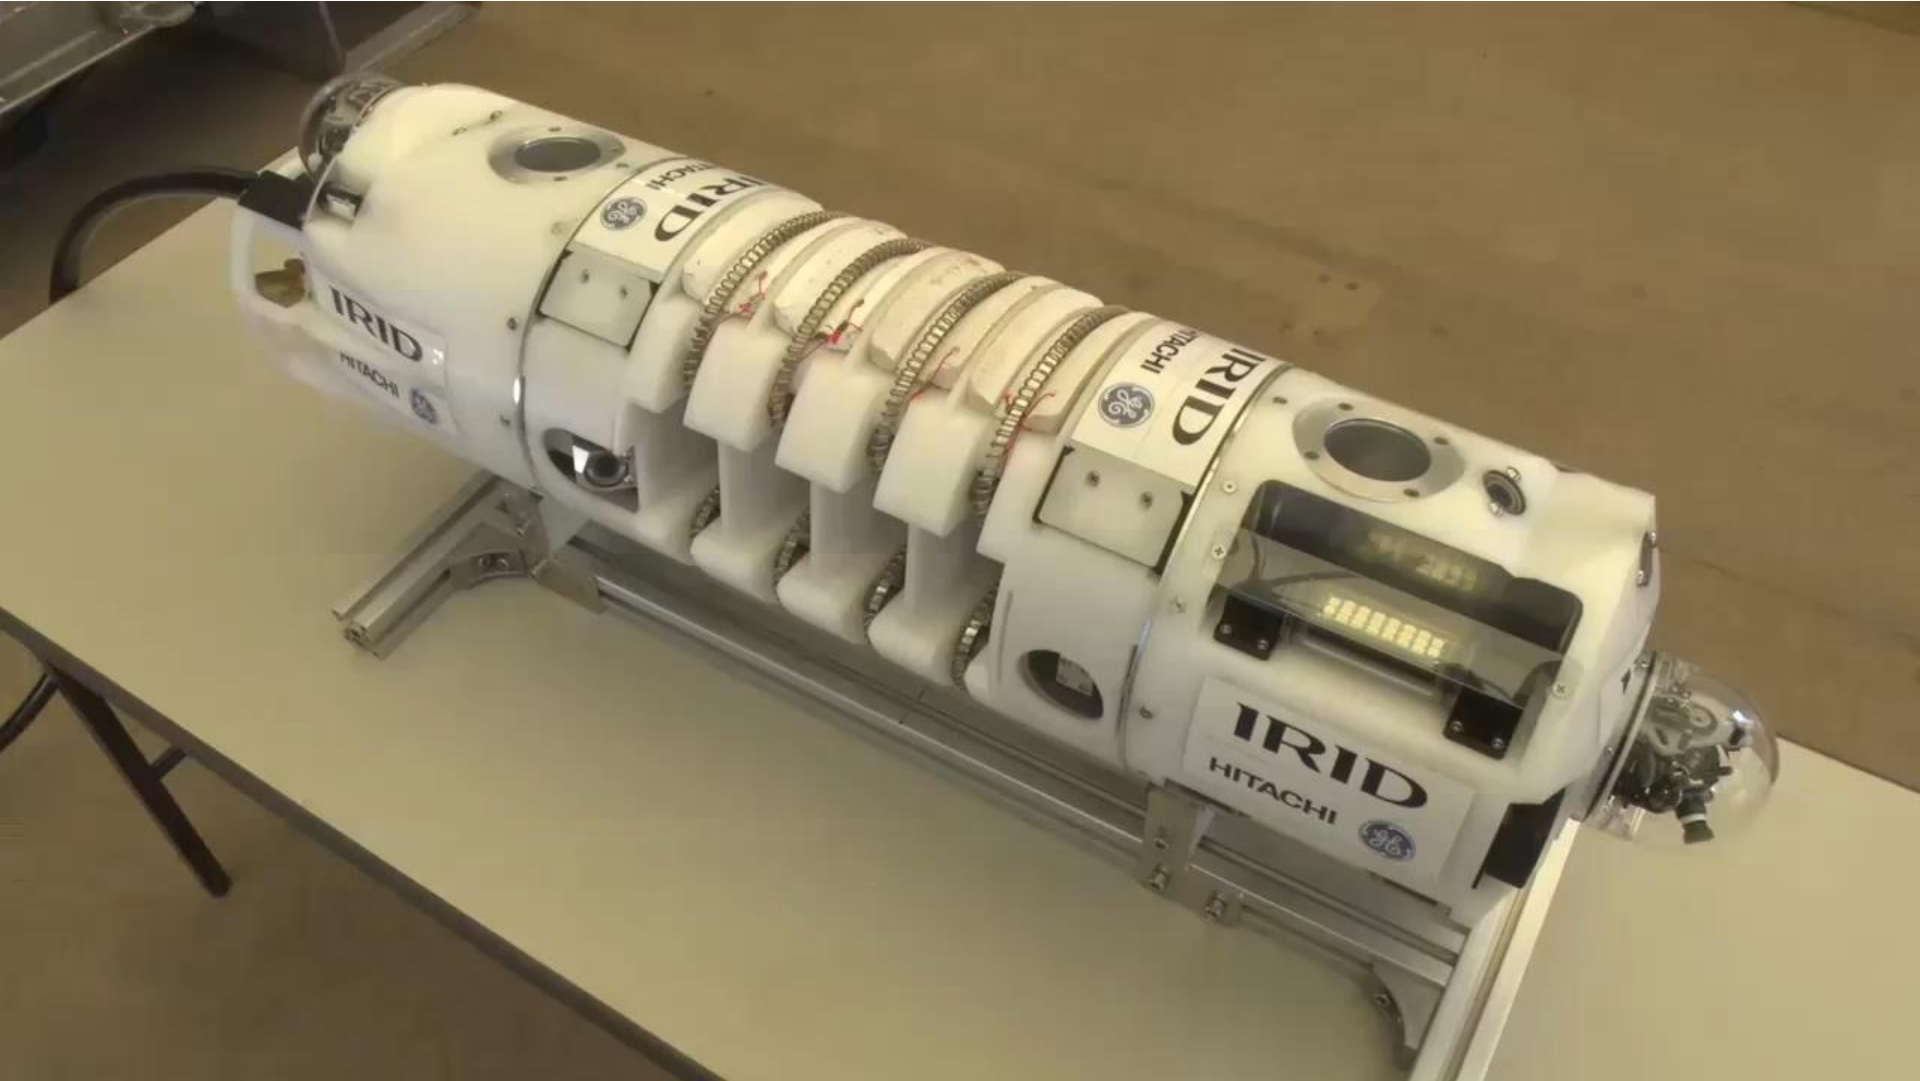


Boat Type Access Equipment (Investigation inside PCV through X-2 penetration)

- Six kinds of boat type access and investigation equipment with submersible functions will be prepared for each function.

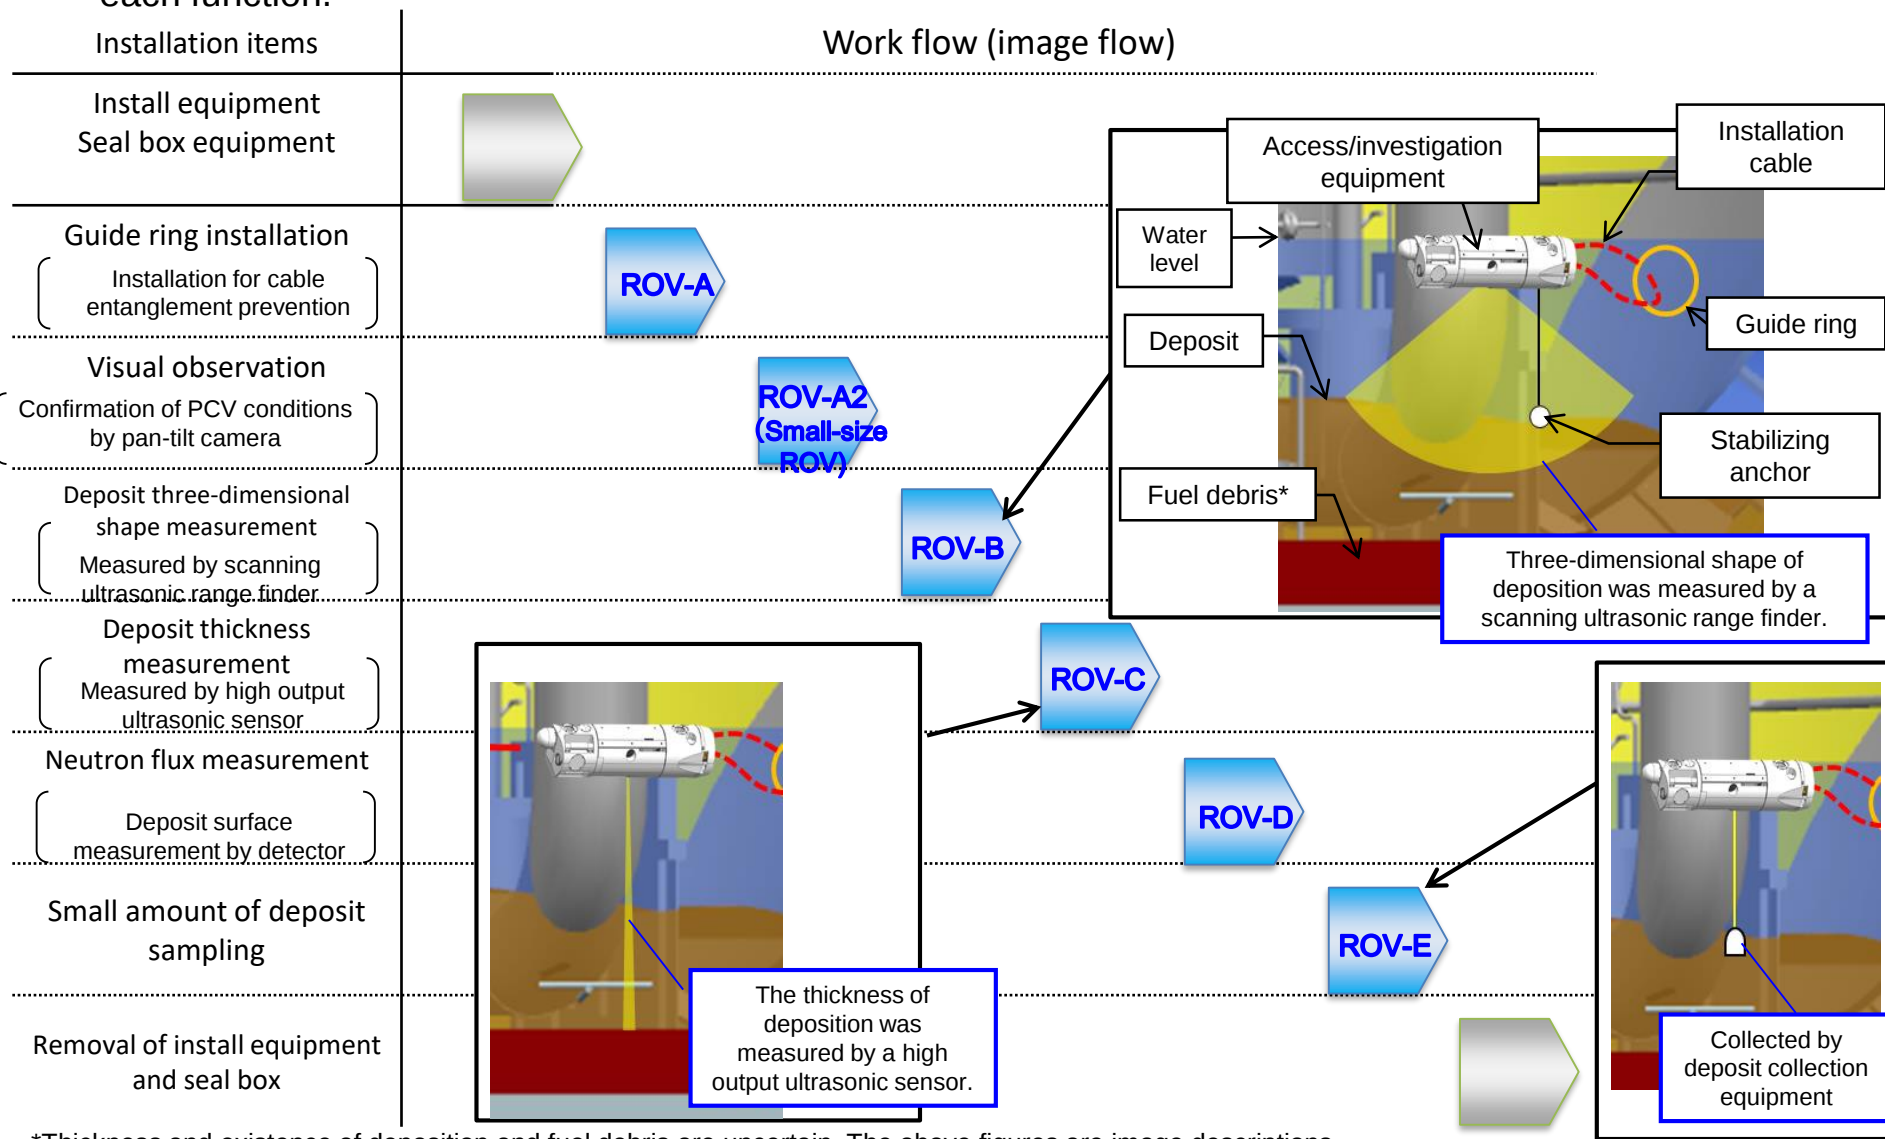

*Thickness and existence of deposition and fuel debris are uncertain. The above figures are image descriptions.

【Reference】 Panoramic photo images taken from the pedestal opening

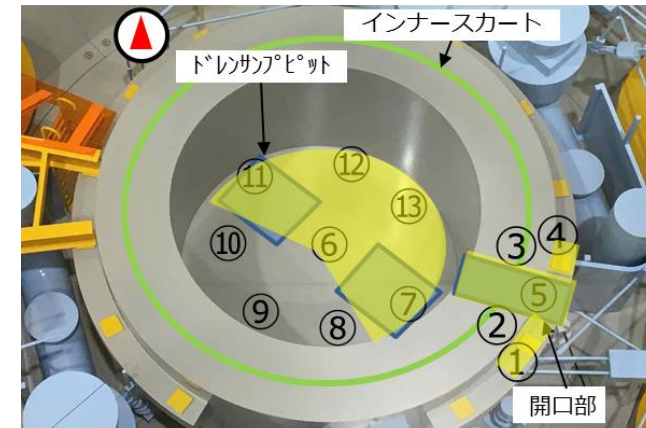

[Reference] Concrete remains of the right pedestal opening (1/2)**TEPCO**

- Tokyo Electric Power Company (TEPCO) Holdings, Inc. investigated the Unit 1 pedestal to confirm the concrete that likely remain outside the pedestal (Bolts that were installed before the accident were confirmed to be fixed). The investigation on March 2023 confirmed the inside of the pedestal wall.
- TEPCO assumes that the lost concrete of the pedestal outer wall opening in right side would be limited.
- The investigation found that reinforcing steels of the outside pedestal have remained 7 pieces in the right opening part and 11 pieces in the left side. The earthquake resistance should be evaluated based on 64° that is equivalent to the angle in accordance with the opening angle.

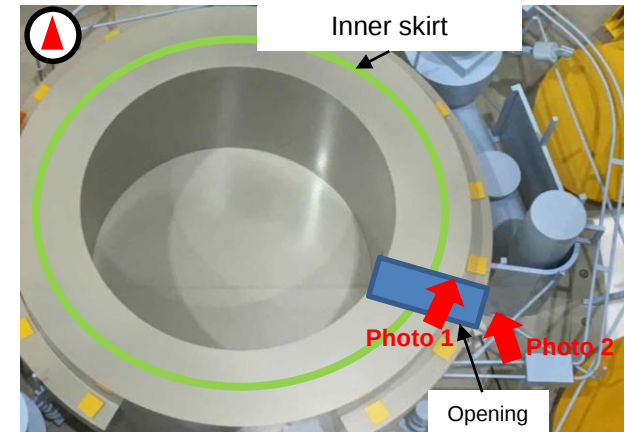


Photo 1: Concrete remains can be seen from the pedestal opening

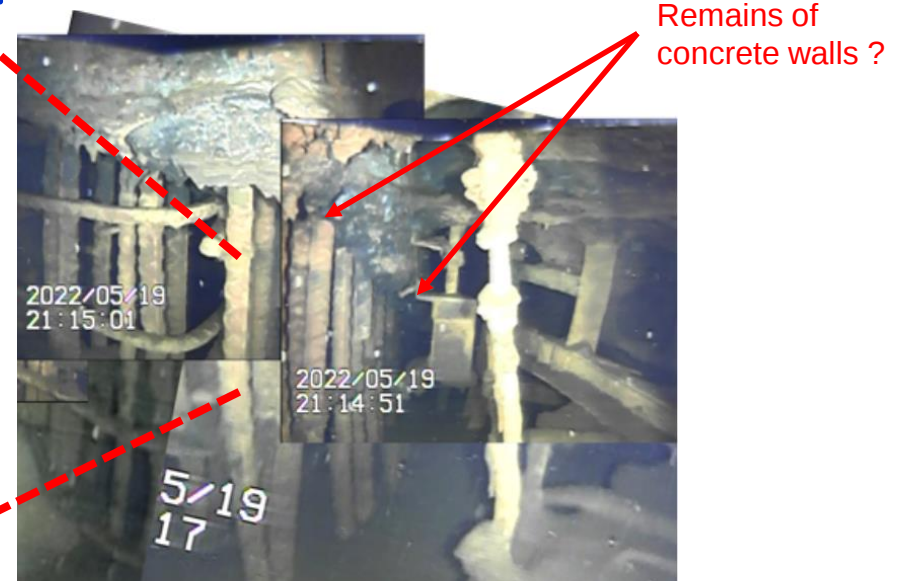


Photo 2: Concrete remains can be seen from the pedestal opening

【Reference】 Concrete remains of the right pedestal opening (2/2)

TEPCO

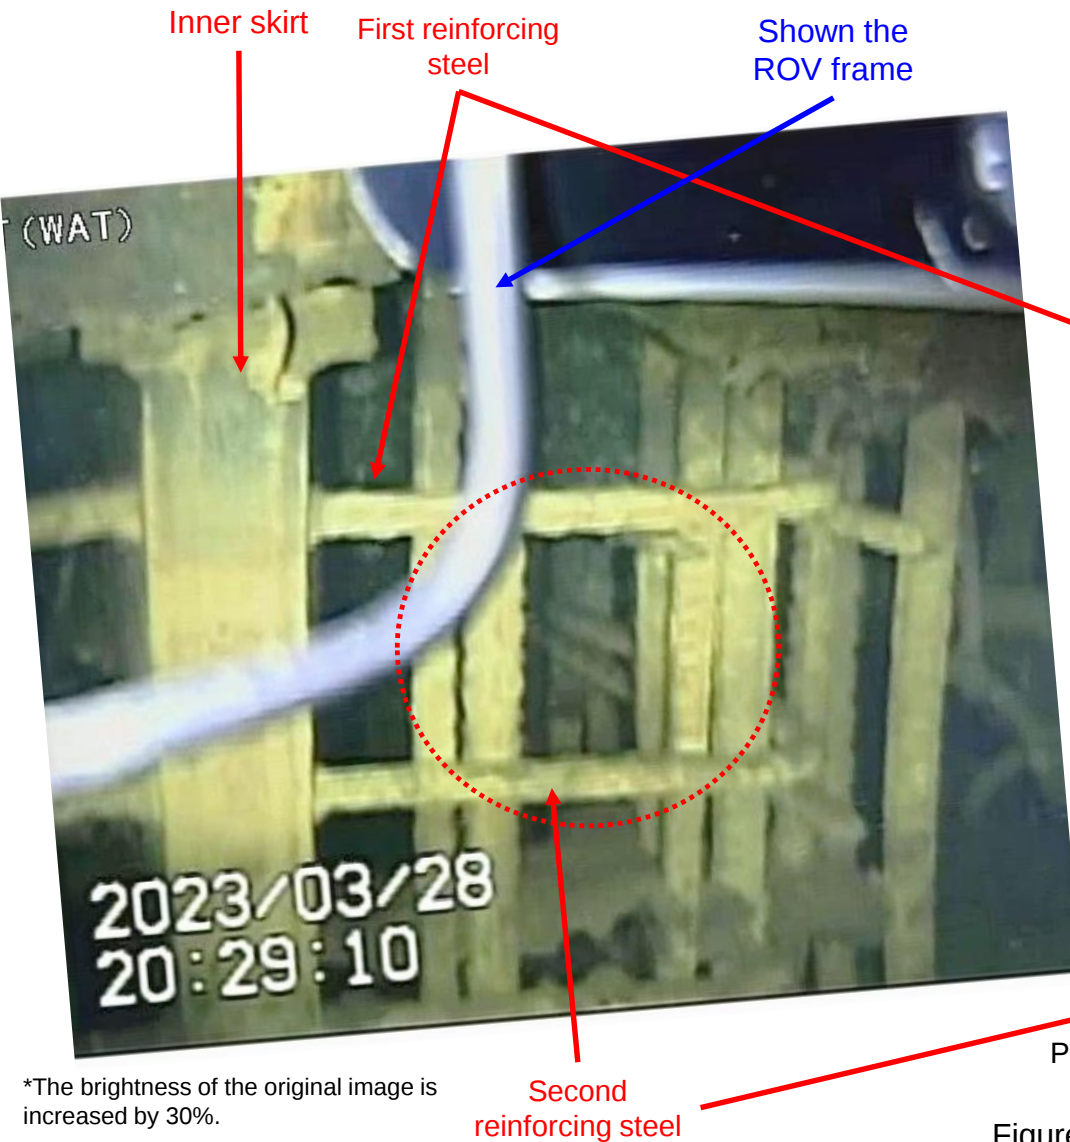


Figure 1: Remains of the pedestal outer wall of the right opening

*The brightness of the original image is increased by 50%.


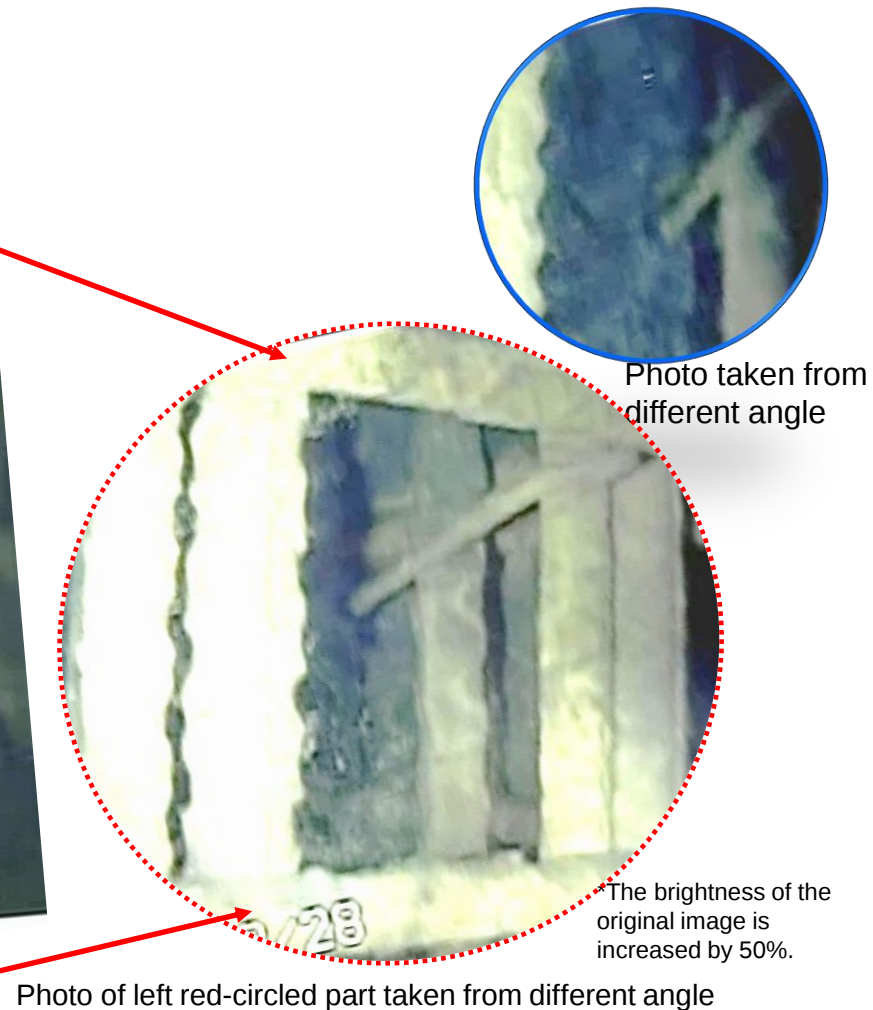


Figure 2: Visual image taken from different angle of the remains

[Reference] Sampling Debris with the Telescopic Fuel Debris Trial Retrieval Device

- The telescopic device will be used for the trial retrieval of fuel debris by accessing the inside of the PCV from the X-6 penetration
- Since it will be connected to the connection pipe, the enclosure will serve as a PCV boundary during the trial retrieval of fuel debris.

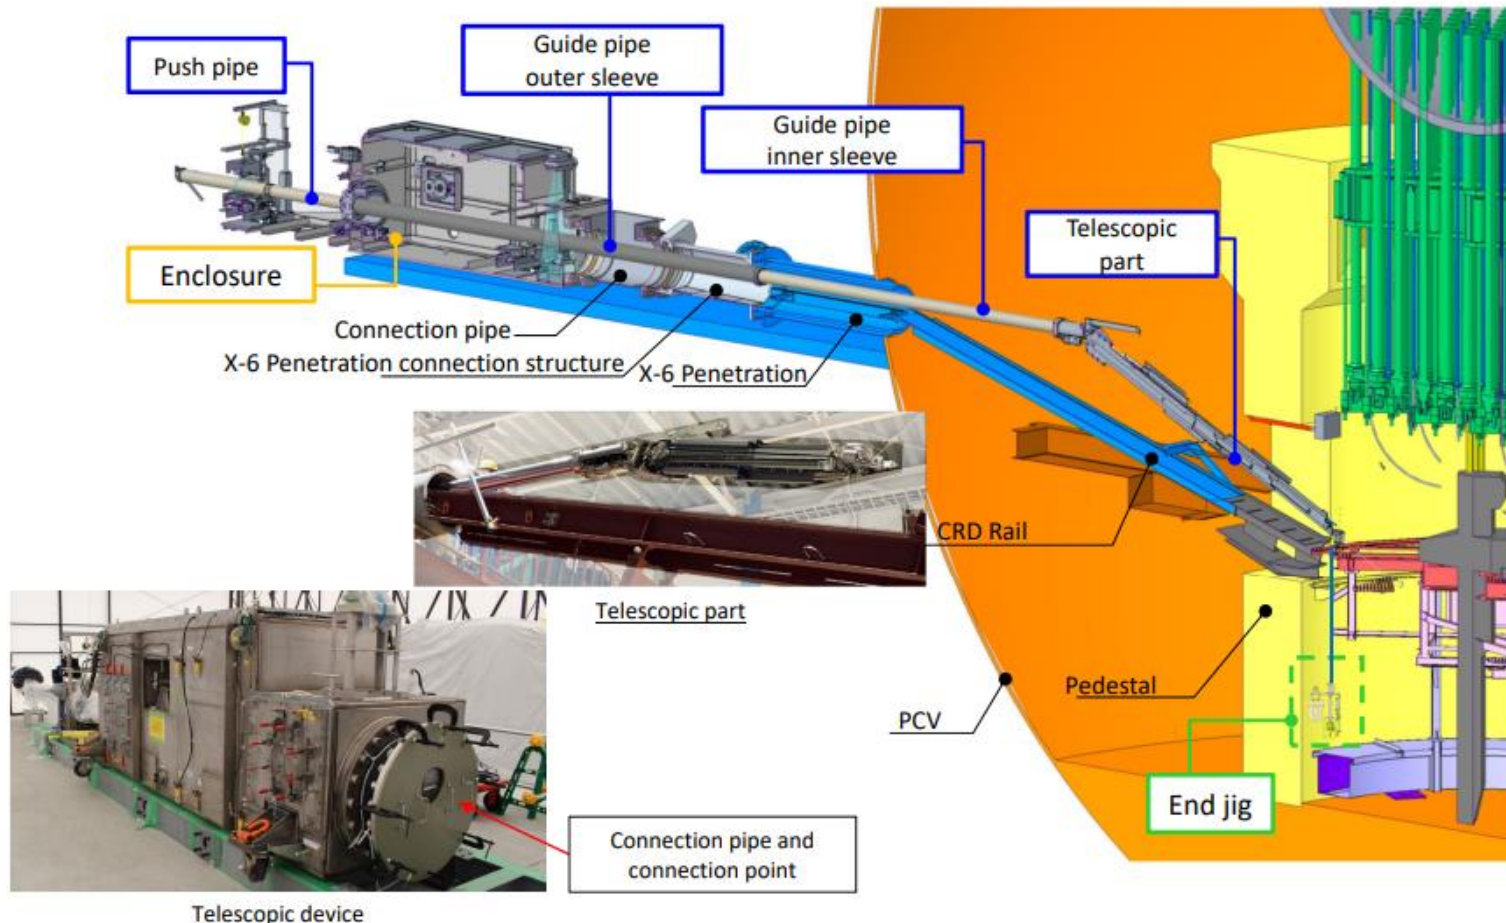

4-2. Field Work Progress Status (Fuel Debris Trial Retrieval)



- On October 30, the end jig of the telescopic device was lowered to perform a fuel debris grasping work at the bottom of the pedestal.
- The end jig returned to the position before work starts while its gripper still holds the fuel debris and the grasping work was completed.
- The guide pipe is being removed, and radiation of the fuel debris will be measured after the end jig is returned inside the enclosure.



At the remote operations room



End jig grasping fuel debris


- At 10:00 a.m. on April 17, it was determined that the bottom of primary containment vessel could be accessed through the opening 2, and at 10:52 a.m. fuel debris was grasped below the opening 2. Thereafter, at 11:38 a.m. the telescopic device with fuel debris sample in hand was retracted to the position it was in prior to commencement of this task. (Completion of fuel debris grasping work)
- Going forward, the guide pipes will be withdrawn and the telescopic device will be retracted into the enclosure. When the fuel debris sample is brought into the enclosure, its dose measurements will be taken.



Above the opening 2



Grasping fuel debris below the opening 2

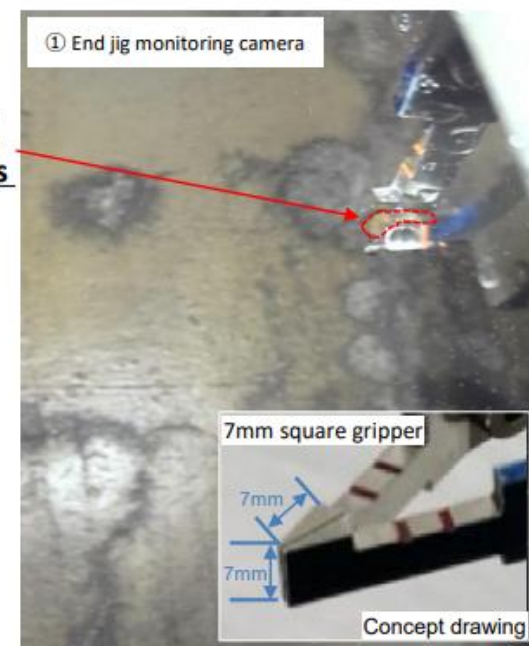


Completion of fuel debris grasping work

Fuel debris grasping work at the Fukushima Daiichi Nuclear Power Station Unit 2

(Photographed on April 17, 2025)

Arm Type Access Equipment


- The arm type access equipment was manufactured which can access on a wide range through the PCV penetration for maintenance of control rod drive mechanism.
 - Total length of the arm: Approx. 22m
 - Investigation equipment up to 10kg can be loaded.

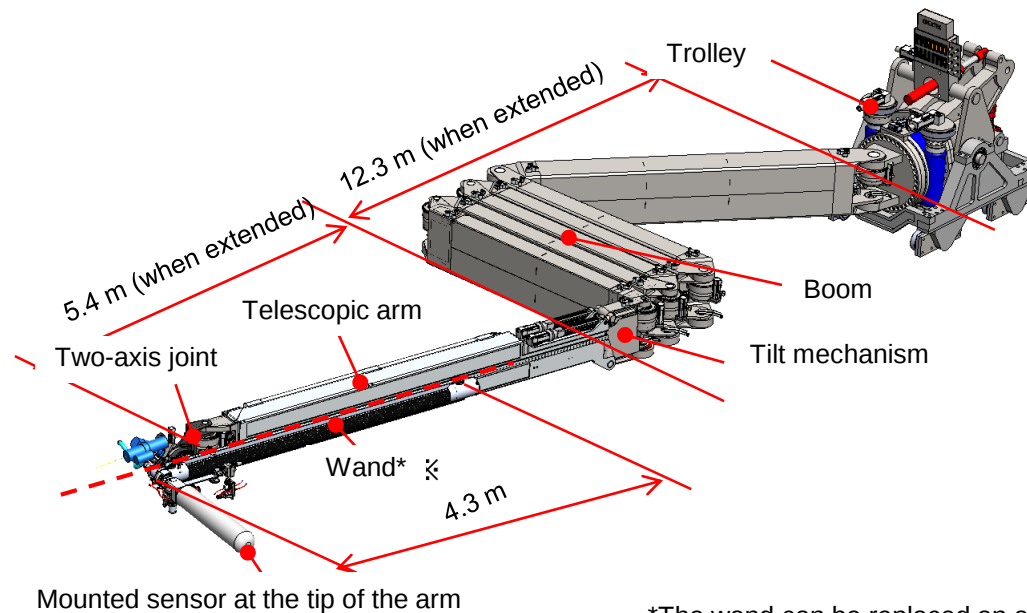

*The wand can be replaced an alternative tool.

Arm type access equipment

Configuration of Access Equipment


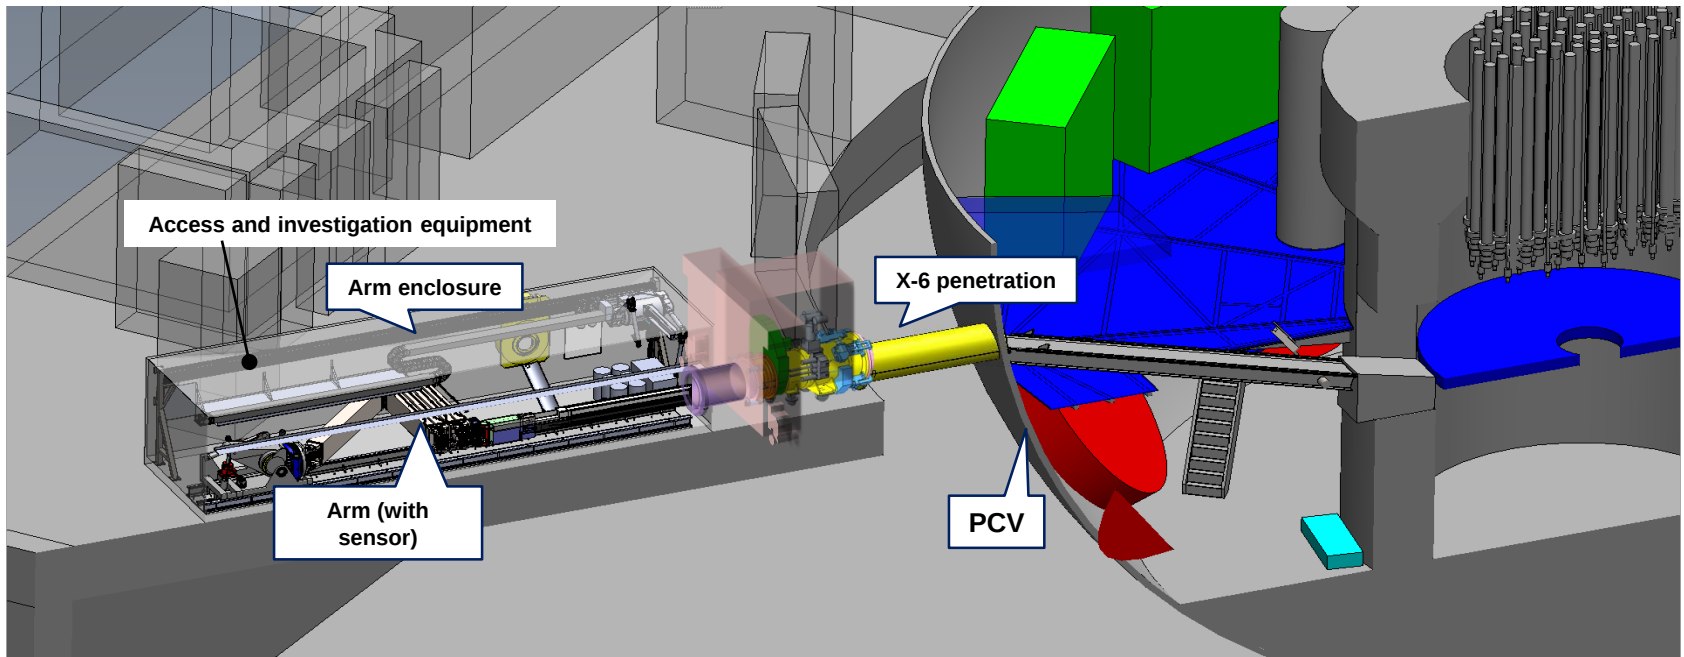


Arm Type Access Equipment (video)




Mock-up Test Preparation

(JAEA NARREC: Naraha Center for Remote Control Technology Development)

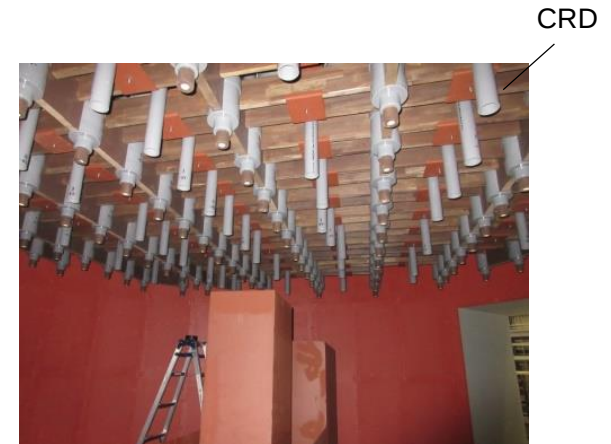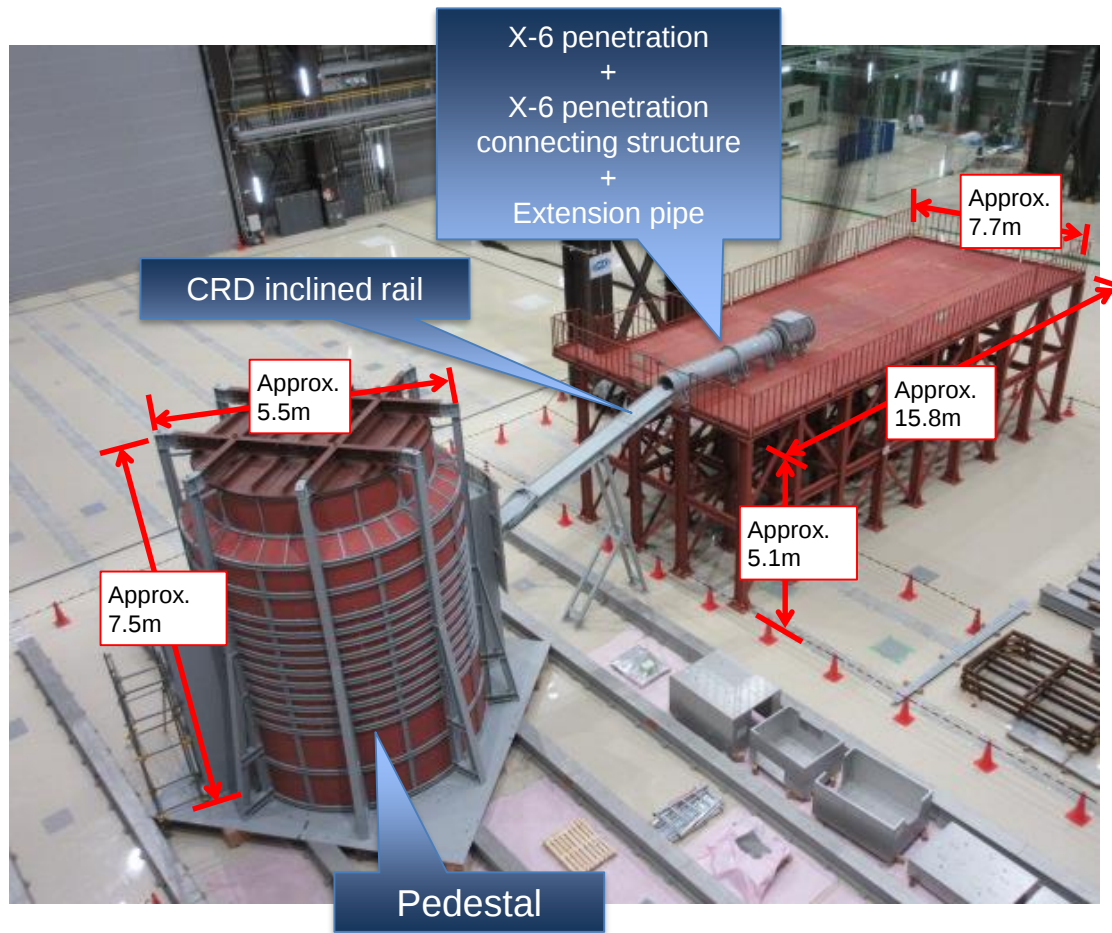

State of the pedestal interior

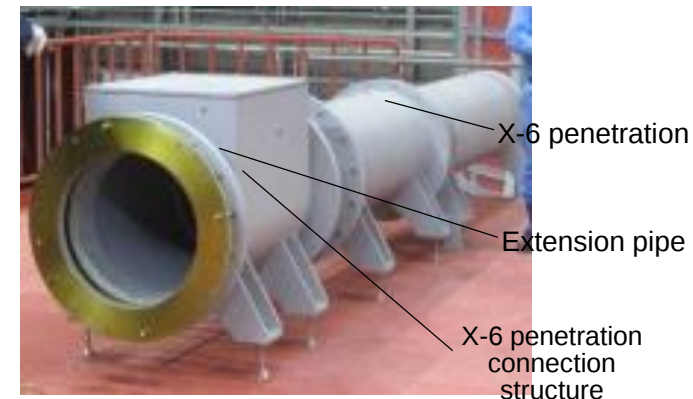

Appearance of the X-6 penetration
(connection structure + extension pipe)

Contents


1. Introduction
2. Development of Remotely Operation Equipment for Dose Reduction
3. Development of Repairing Technology for PCV
4. Development of Investigation Technology for inside PCV
- 5. Development of Technology for Fuel Debris Retrieval**
6. Nuclear Safety Enhancement

PCV : primary containment vessel


Development of the Large Scale Fuel Debris Retrieval Method

To increase the retrieval scale, large-scale apparatus was installed.


- Fuel debris retrieval methods are being developed:
Three side-access retrieval methods and two top-access methods.
- The retrieval amount of fuel debris will be gradually increased to up to 300 kg per day.
- NDF assessed that Unit 3 is an appropriate unit to start fuel debris retrieval (by side-access method).
- The obtained technology, know-how, organization structure, experiences and lesson-learned will be expected to be utilized for design, procurement, construction and operation.

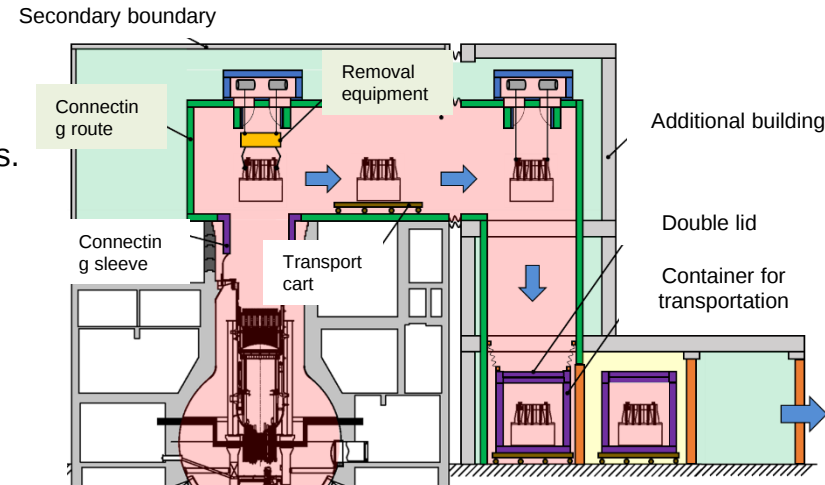

Carry-out and removal of the whole structure

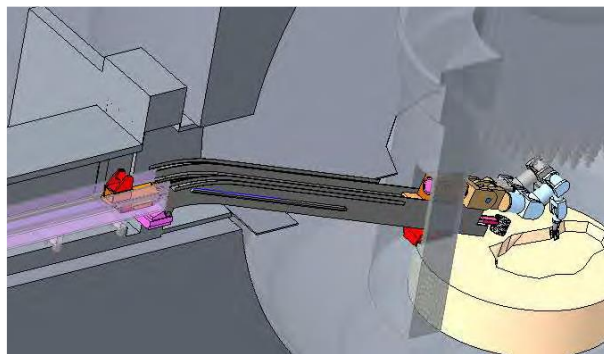


The access rail method

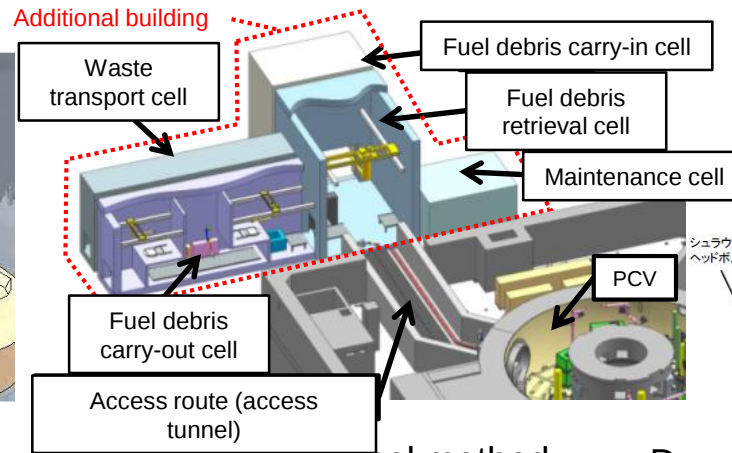


The access tunnel method

A concept of separator removal

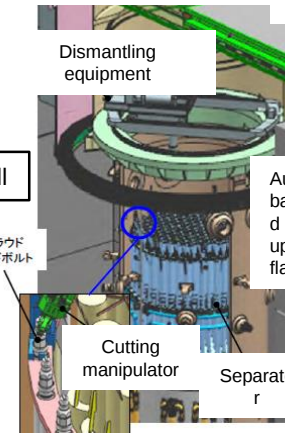


A concept of jet pump removal equipment

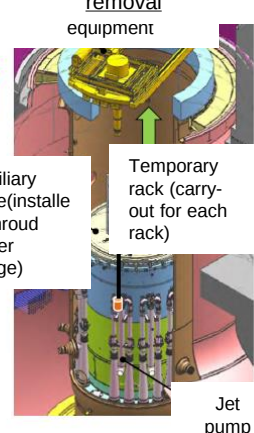

Development of the removal method for the reactor internal structure


Fuel Debris Retrieval Technology

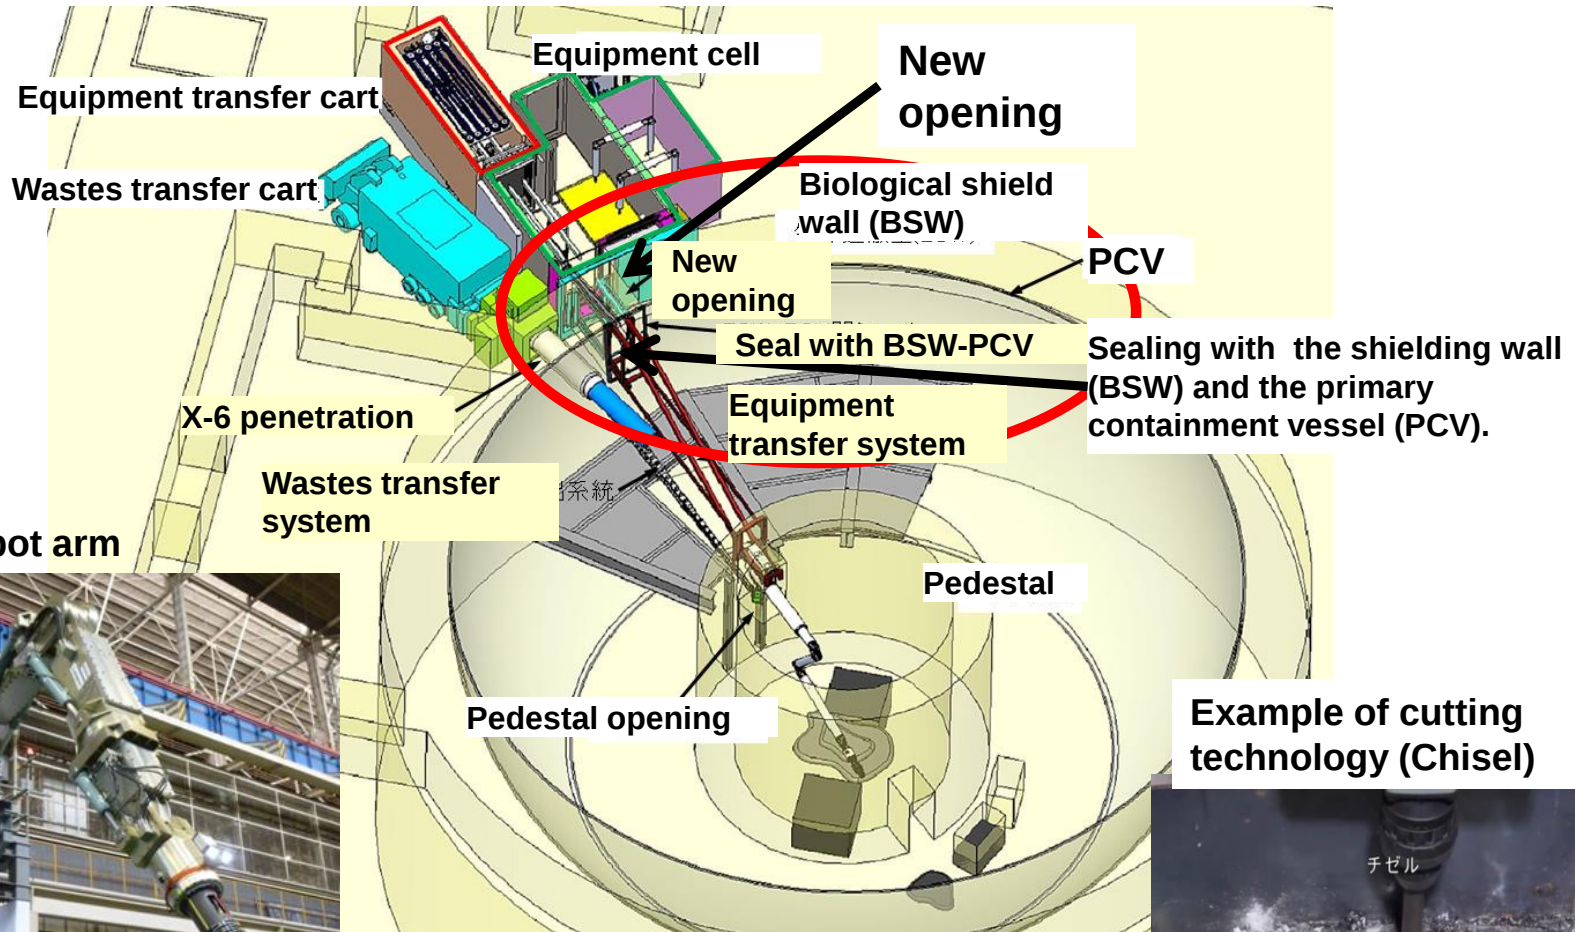

Example of the side access method (illustration)

Access Tunnel Method

- The access tunnel method is required **to connect a heavy-lift tunnel (approximately 800 ton)** with the primary containment vessel (PCV) from outside the reactor building **through the precise position control system**.
- **Delivery technology for curved heavy-lift tunnel in narrow spaces** has been developed with applied heavy delivery technology experienced in bridge constructions.

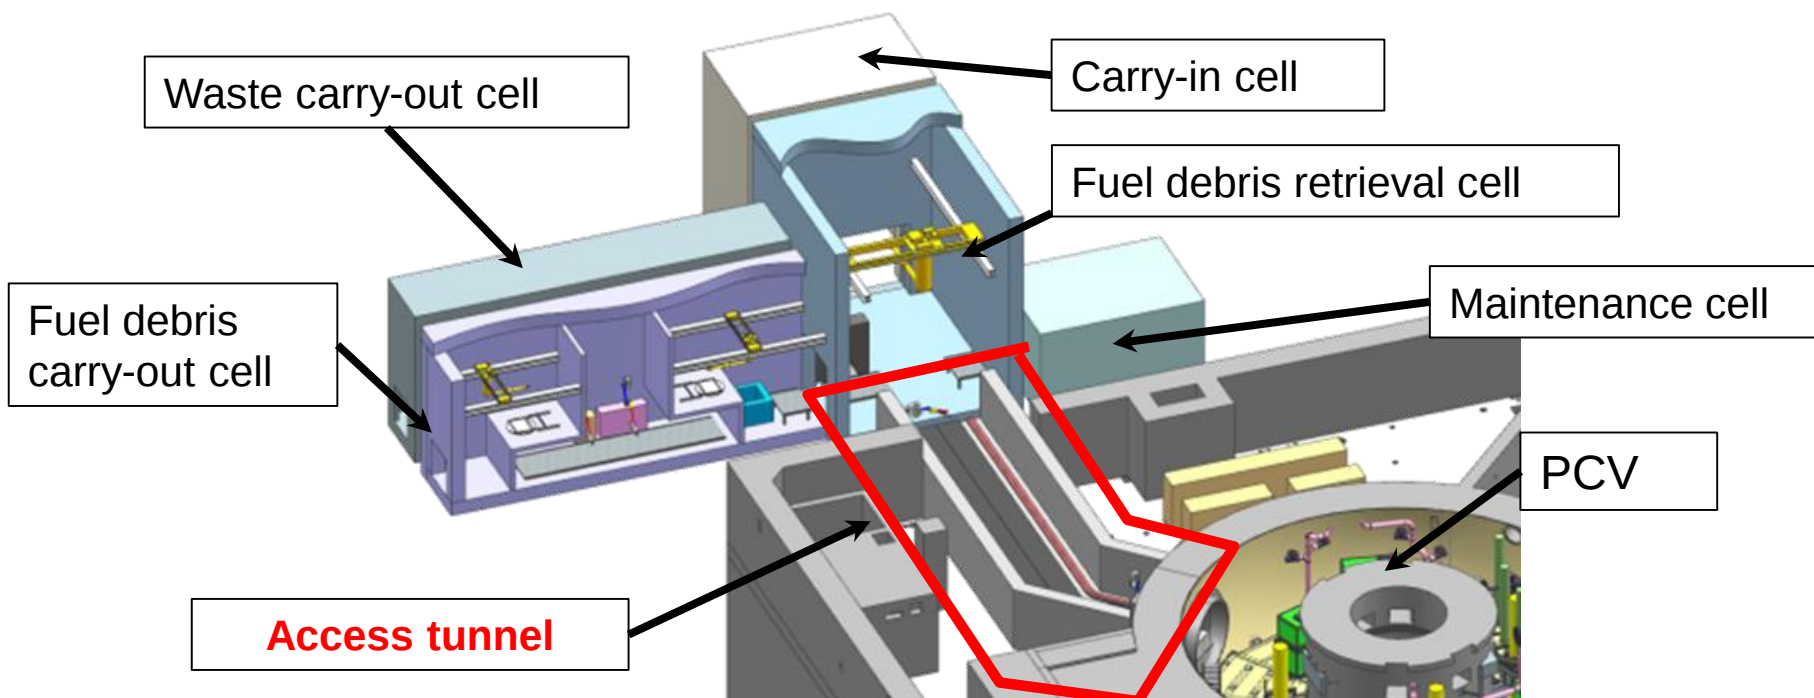

A layout image of the access tunnel method

Element test of tunnel building technology



Direction to delivery


Example of the delivery method

Positioning system

Delivery system

Positioning equipment

Illustration of element testing

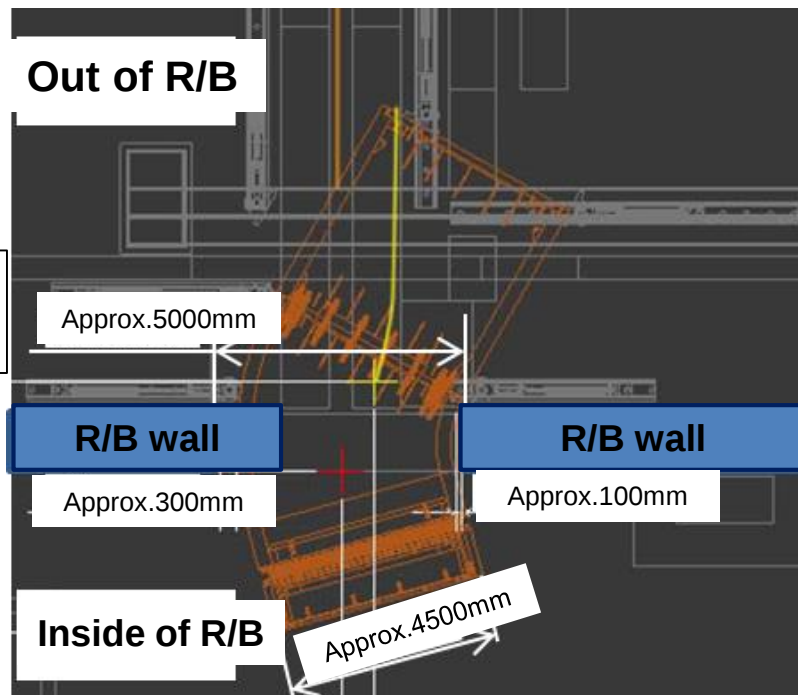

Out of R/B

Approx.5000mm

R/B wall

Approx.300mm

R/B wall

Approx.100mm


Inside of R/B

Approx.4500mm

Illustration of work in narrow areas

*R/B: Reactor building

【Example of the top-access method】: Methods for Removing and Transporting the Entire Structures

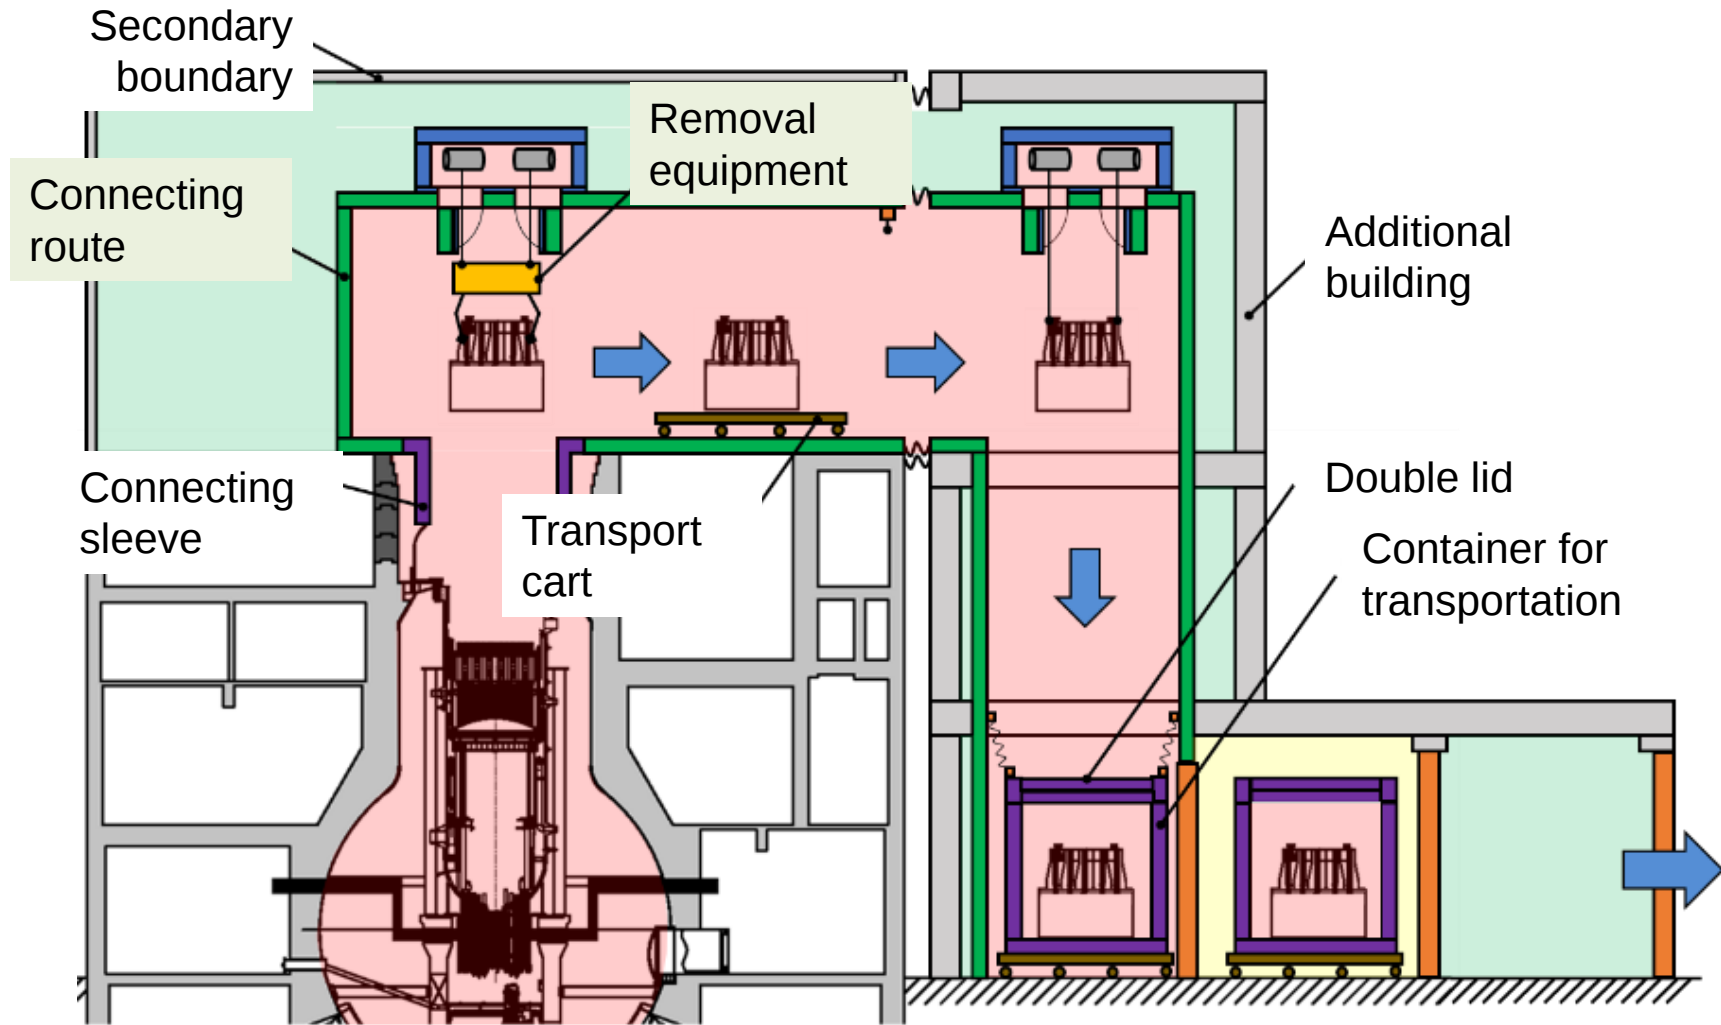


Technology for Containing, Transferring and Storing Fuel Debris

Design of canister

⇒ Responding to issues specific to the Fukushima Daiichi

- High-burnup and the enrichment → **High reactivity**
- Molten products mixed with concrete → **Hydrogen generation** caused by radiolysis of moisture containing concrete
- Molten products with sea water injected and instrumental cables, etc. → Impact of **salt** and contamination of **impurities**

Transport method (Ex. **Partial submersion side-access method**)

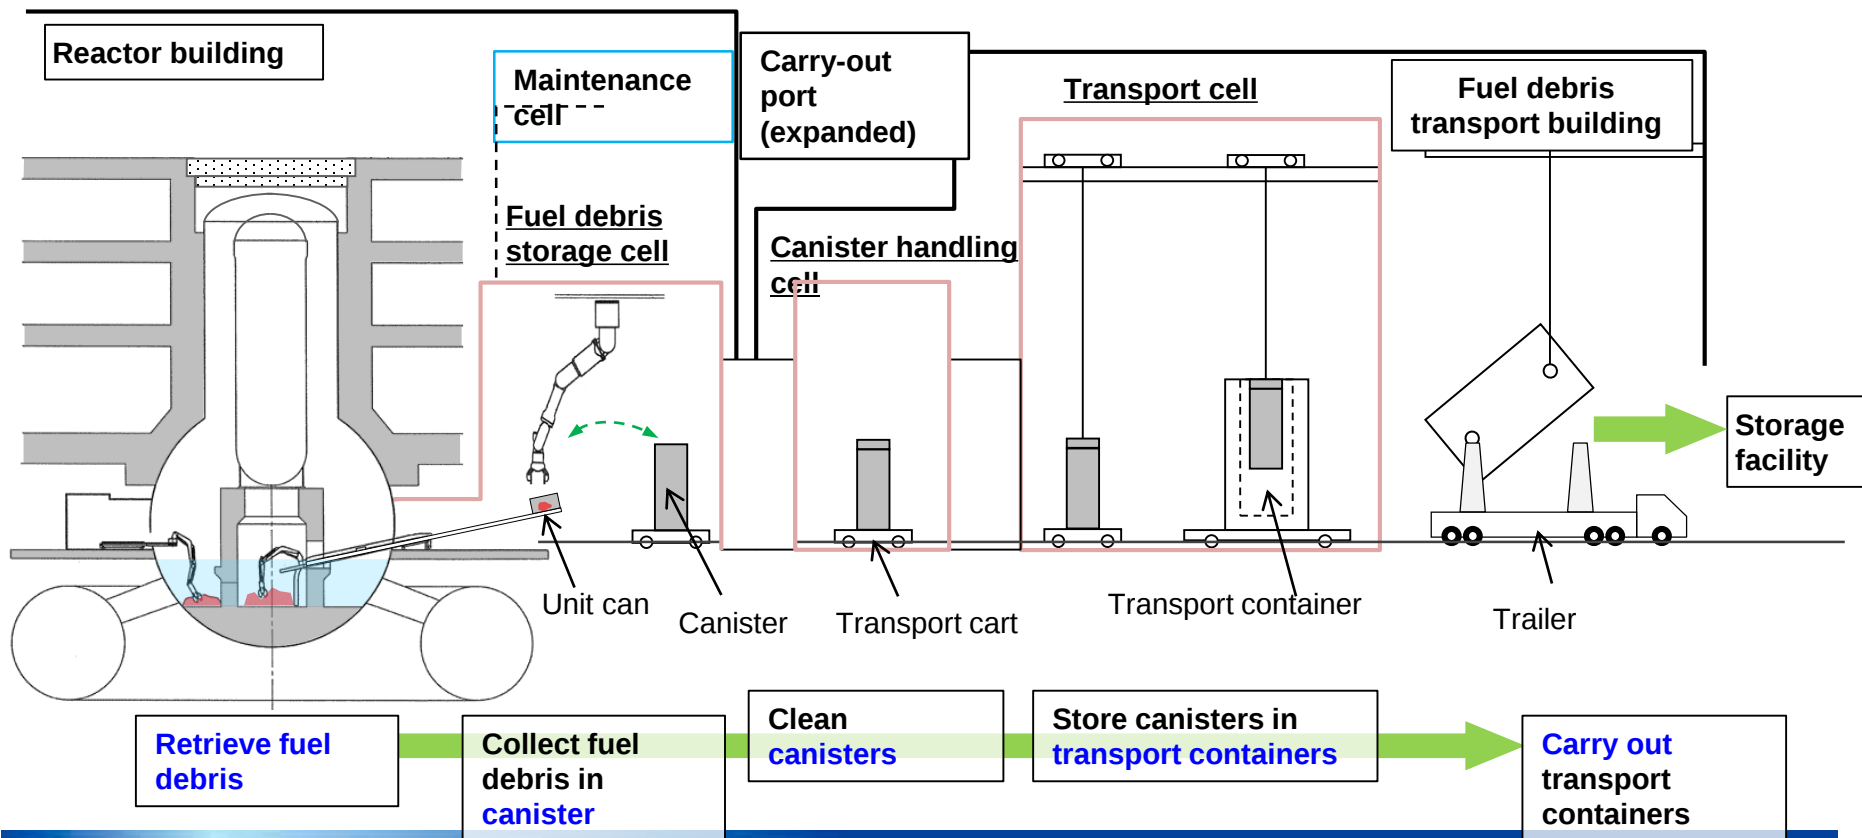

Contents

1. Introduction
2. Development of Remotely Operation Equipment for Dose Reduction
3. Development of Repairing Technology for PCV
4. Development of Investigation Technology for inside PCV
5. Development of Technology for Fuel Debris Retrieval
- 6. Nuclear Safety Enhancement**

PCV : primary containment vessel

Ensuring the Safety When Retrieving Fuel Debris


Risks necessary to be considered

1. Cooling
 - Decay heat has decreased over a long time after the accident, however it must be cooled for a certain period of time. There is a risk of losing its functions.
1. Confinement
 - There is a risk of releasing dust to be generated when cutting and chipping debris.
2. Fire and explosion (inactivation)
 - There is a risk of fire and hydrogen explosion when cutting and chipping debris.
3. Criticality
 - There is a risk of criticality caused by changing the shape of debris during fuel debris retrieval.

Ensuring the Safety When Retrieving Fuel Debris


Necessary safety functions

- 1. Cooling
- 2. Confinement (negative pressure and water level control of the torus room)
- 3. Inactivation (fire and explosion prevention)
- 4. Sub-criticality

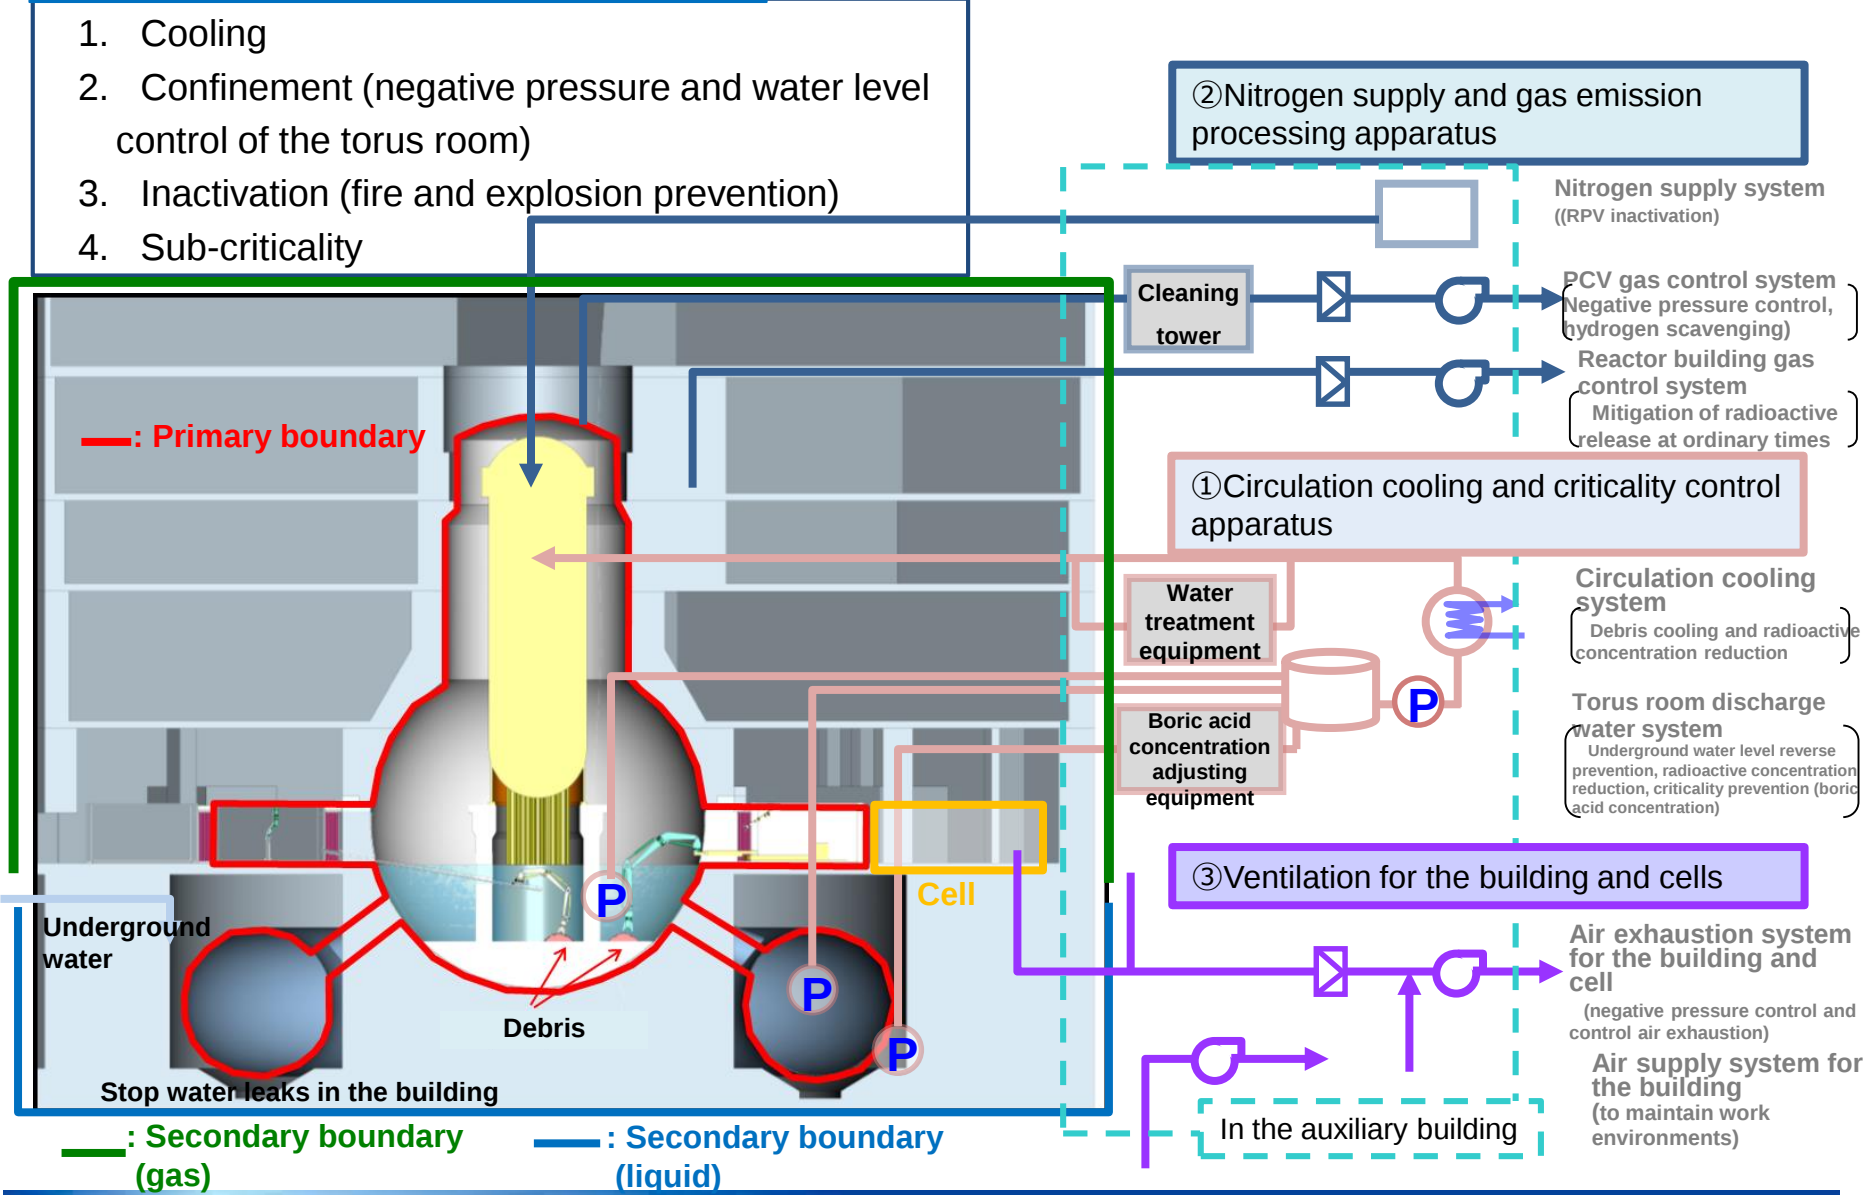


Concepts of Study: Procedures and Feasibility of System Design

- On the basis of the safety requirement setting (tentative), functional requirements from the throughput will be added.
- The safety requirements should be basically unchangeable, however potential current risks and work risks (i.e. work dose of radioactivity) may be reviewed depending on estimated work and evaluation.

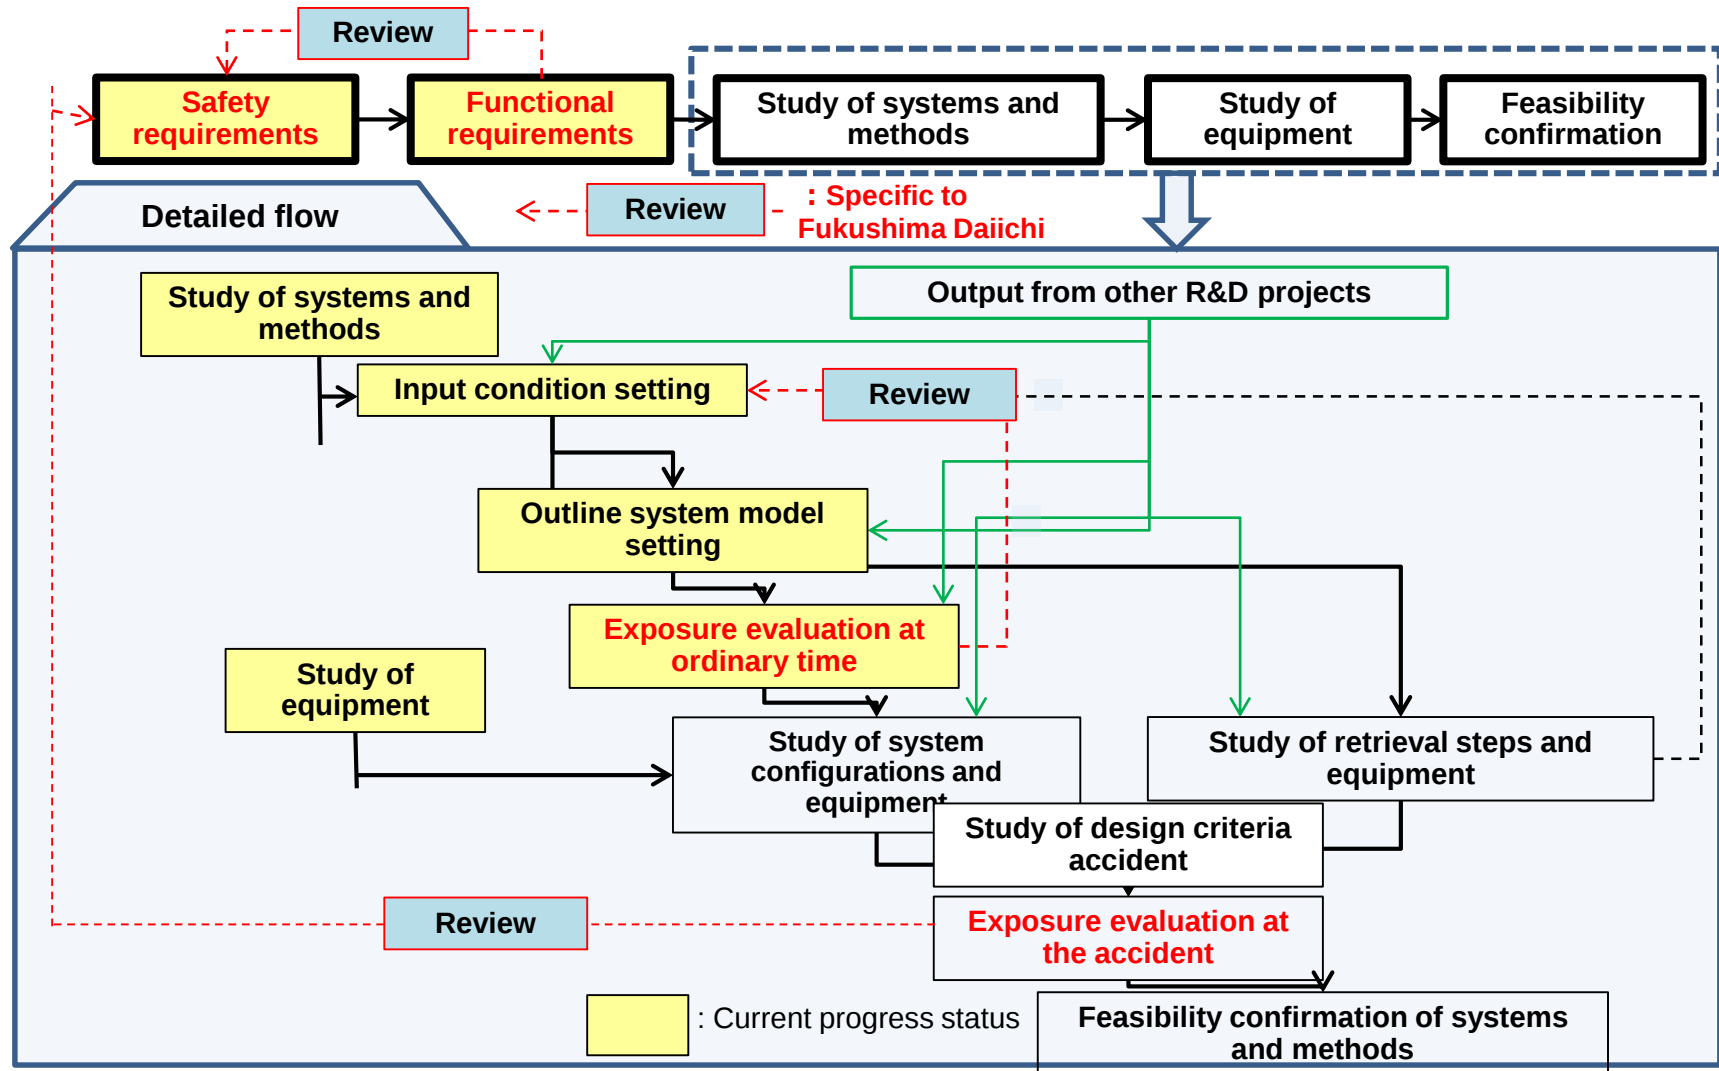

Concepts of Defense in Depth (proposed) (1/2)

- Regardless five levels of defense in depth for the light water reactor, an additional defense level was newly determined for fuel debris retrieval.
- Specifically, **three defense levels**, “**Prevention of abnormal operation,**” “**Control of abnormal operation and termination of failures**” and “**Impact mitigation of accidents of the public**” were determined and organized depending on the safety functions.

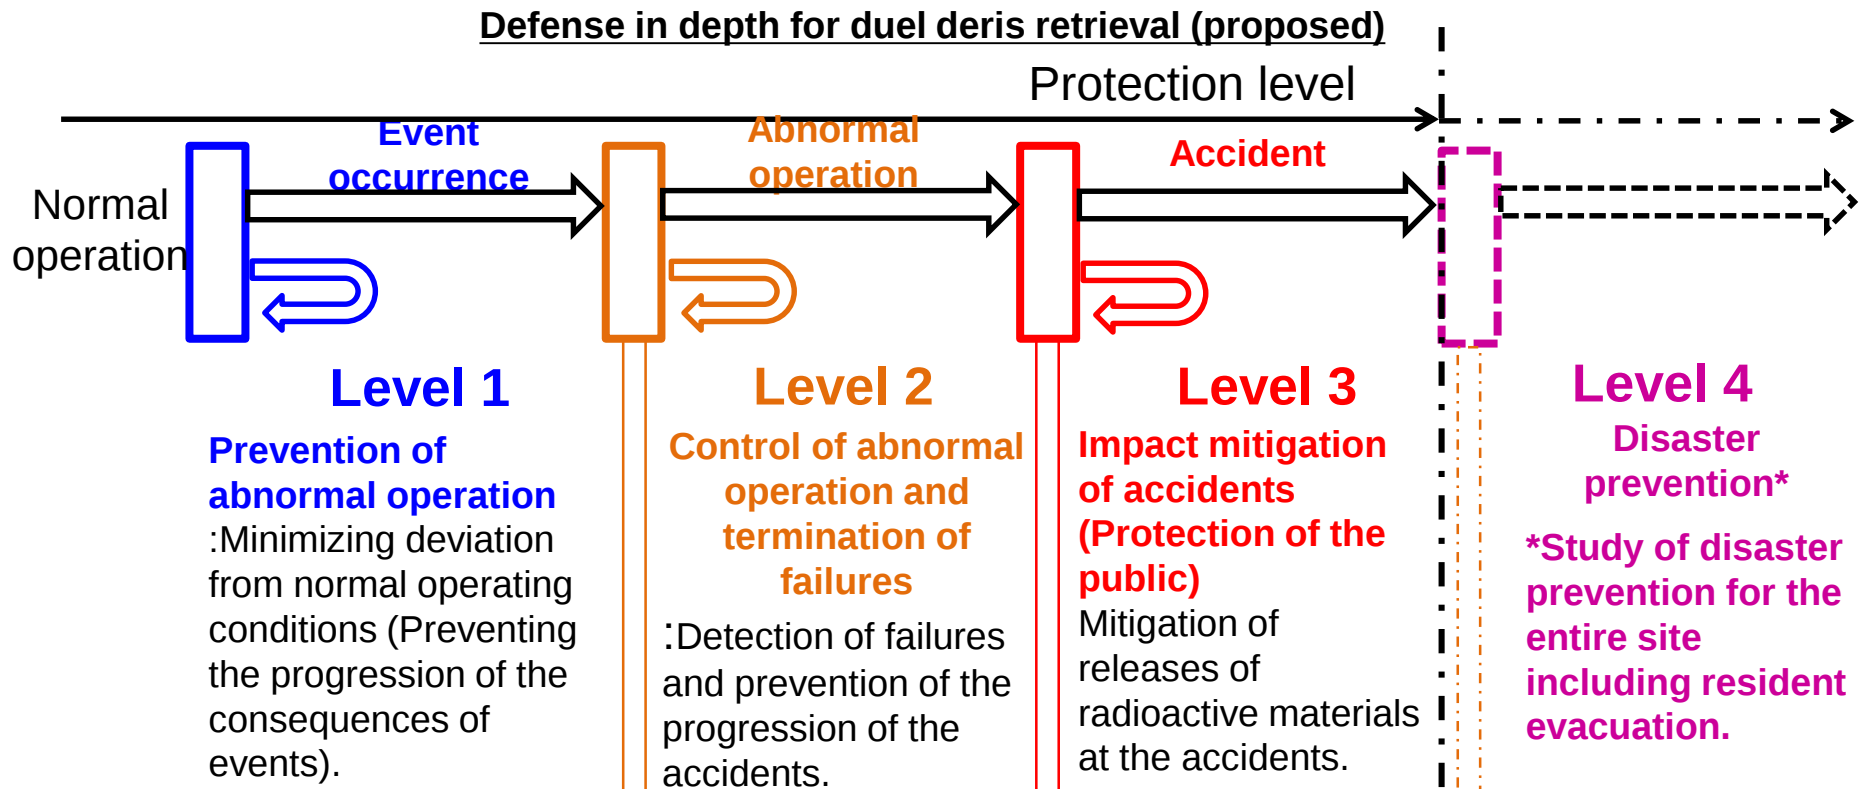

Concepts of Defense in Depth (proposed) (2/2)

- The decommissioning of the Fukushima Daiichi differs from the one of normal plants. Considering a special circumstance of the Fukushima Daiichi that the **decommissioning of the accident plant (work in high radiation environments) will maintain for a long period of time and has a potential hazard of the final level.** The following items were considered to establish the defense in depth.

【Exposure of workers】

- **The effects of worker's exposure associated with installation work should be also considered** in addition to effects of the exposure during fuel debris retrieval and exposure reduction of the public. The purpose of exposure reduction is to totally reduce exposure for the public and workers.

【Event progression】

- At the time of functional loss, existing facilities will respond to events that rapidly progress. **Transportable equipment will also be utilized for slow-progression-events.**

【Robustness of existing facilities】

- The robustness of the facility is required for events that rapidly progress and its function is expected to be used. **In case that the function is expected to be used for only normal time and is not significant even though it takes time to restore the function at the time of functional loss, the robustness will not be required.**

Summary

- In the development of debris retrieval work technology, detailed on-site surveys are important for ensuring safety and earlier decommissioning work.
- Preparations for detailed investigation in the containment vessel and the taking out of small amounts of debris are underway.
- Risk assessment and defense in depth have been examined, and the conceptual design of debris retrieval systems has been advanced.
- Technology development concerning nuclear safety such as criticality control and hydrogen generation control are also being advanced.

End of presentation